


- KEYED NOTES:
- 10" OSA UP THRU ROOF WITH A 2-POSITION DAMPER AND A BALANCING DAMPER. TERMINATE AT ROOF WITH A GOOSENECK. CONNECT TO RA PLENUM. BALANCE TO 135 CFM.
 - 10" OSA DUCT UP THRU ROOF. TERMINATE AT ROOF WITH A GOOSENECK.
 - 12x12 OSA UP THRU ROOF TO GOOSENECK.
 - 6" EA UP THRU ROOF TO GOOSENECK.
 - 8" EA UP THRU ROOF TO GOOSENECK.
 - 16x24 SA UP ON WALL THRU UNDERSIDE OF EAVE.
 - 16x24 SA DN THRU ROOF.
 - 14x20 RA UP ON WALL THRU UNDERSIDE OF EAVE.
 - 14x20 RA DN THRU ROOF.
- GENERAL NOTES:
- SEE SHEET M5.1 FOR CONTROLS.
 - CONTRACTOR TO VERIFY EXISTING SITE CONDITIONS TO ENSURE EQUIPMENTS ARE INSTALLED WITH PROPER MAINTENANCE CLEARANCE.
 - BALANCE OSA DUCT TO MIN OSA SHOWN ON EQUIPMENT SCHEDULE.
 - INSULATE ALL SUPPLY AND RETURN DUCTWORK INSTALLED OUTSIDE BUILDING ENVELOPE, PER OREGON ENERGY CODE.

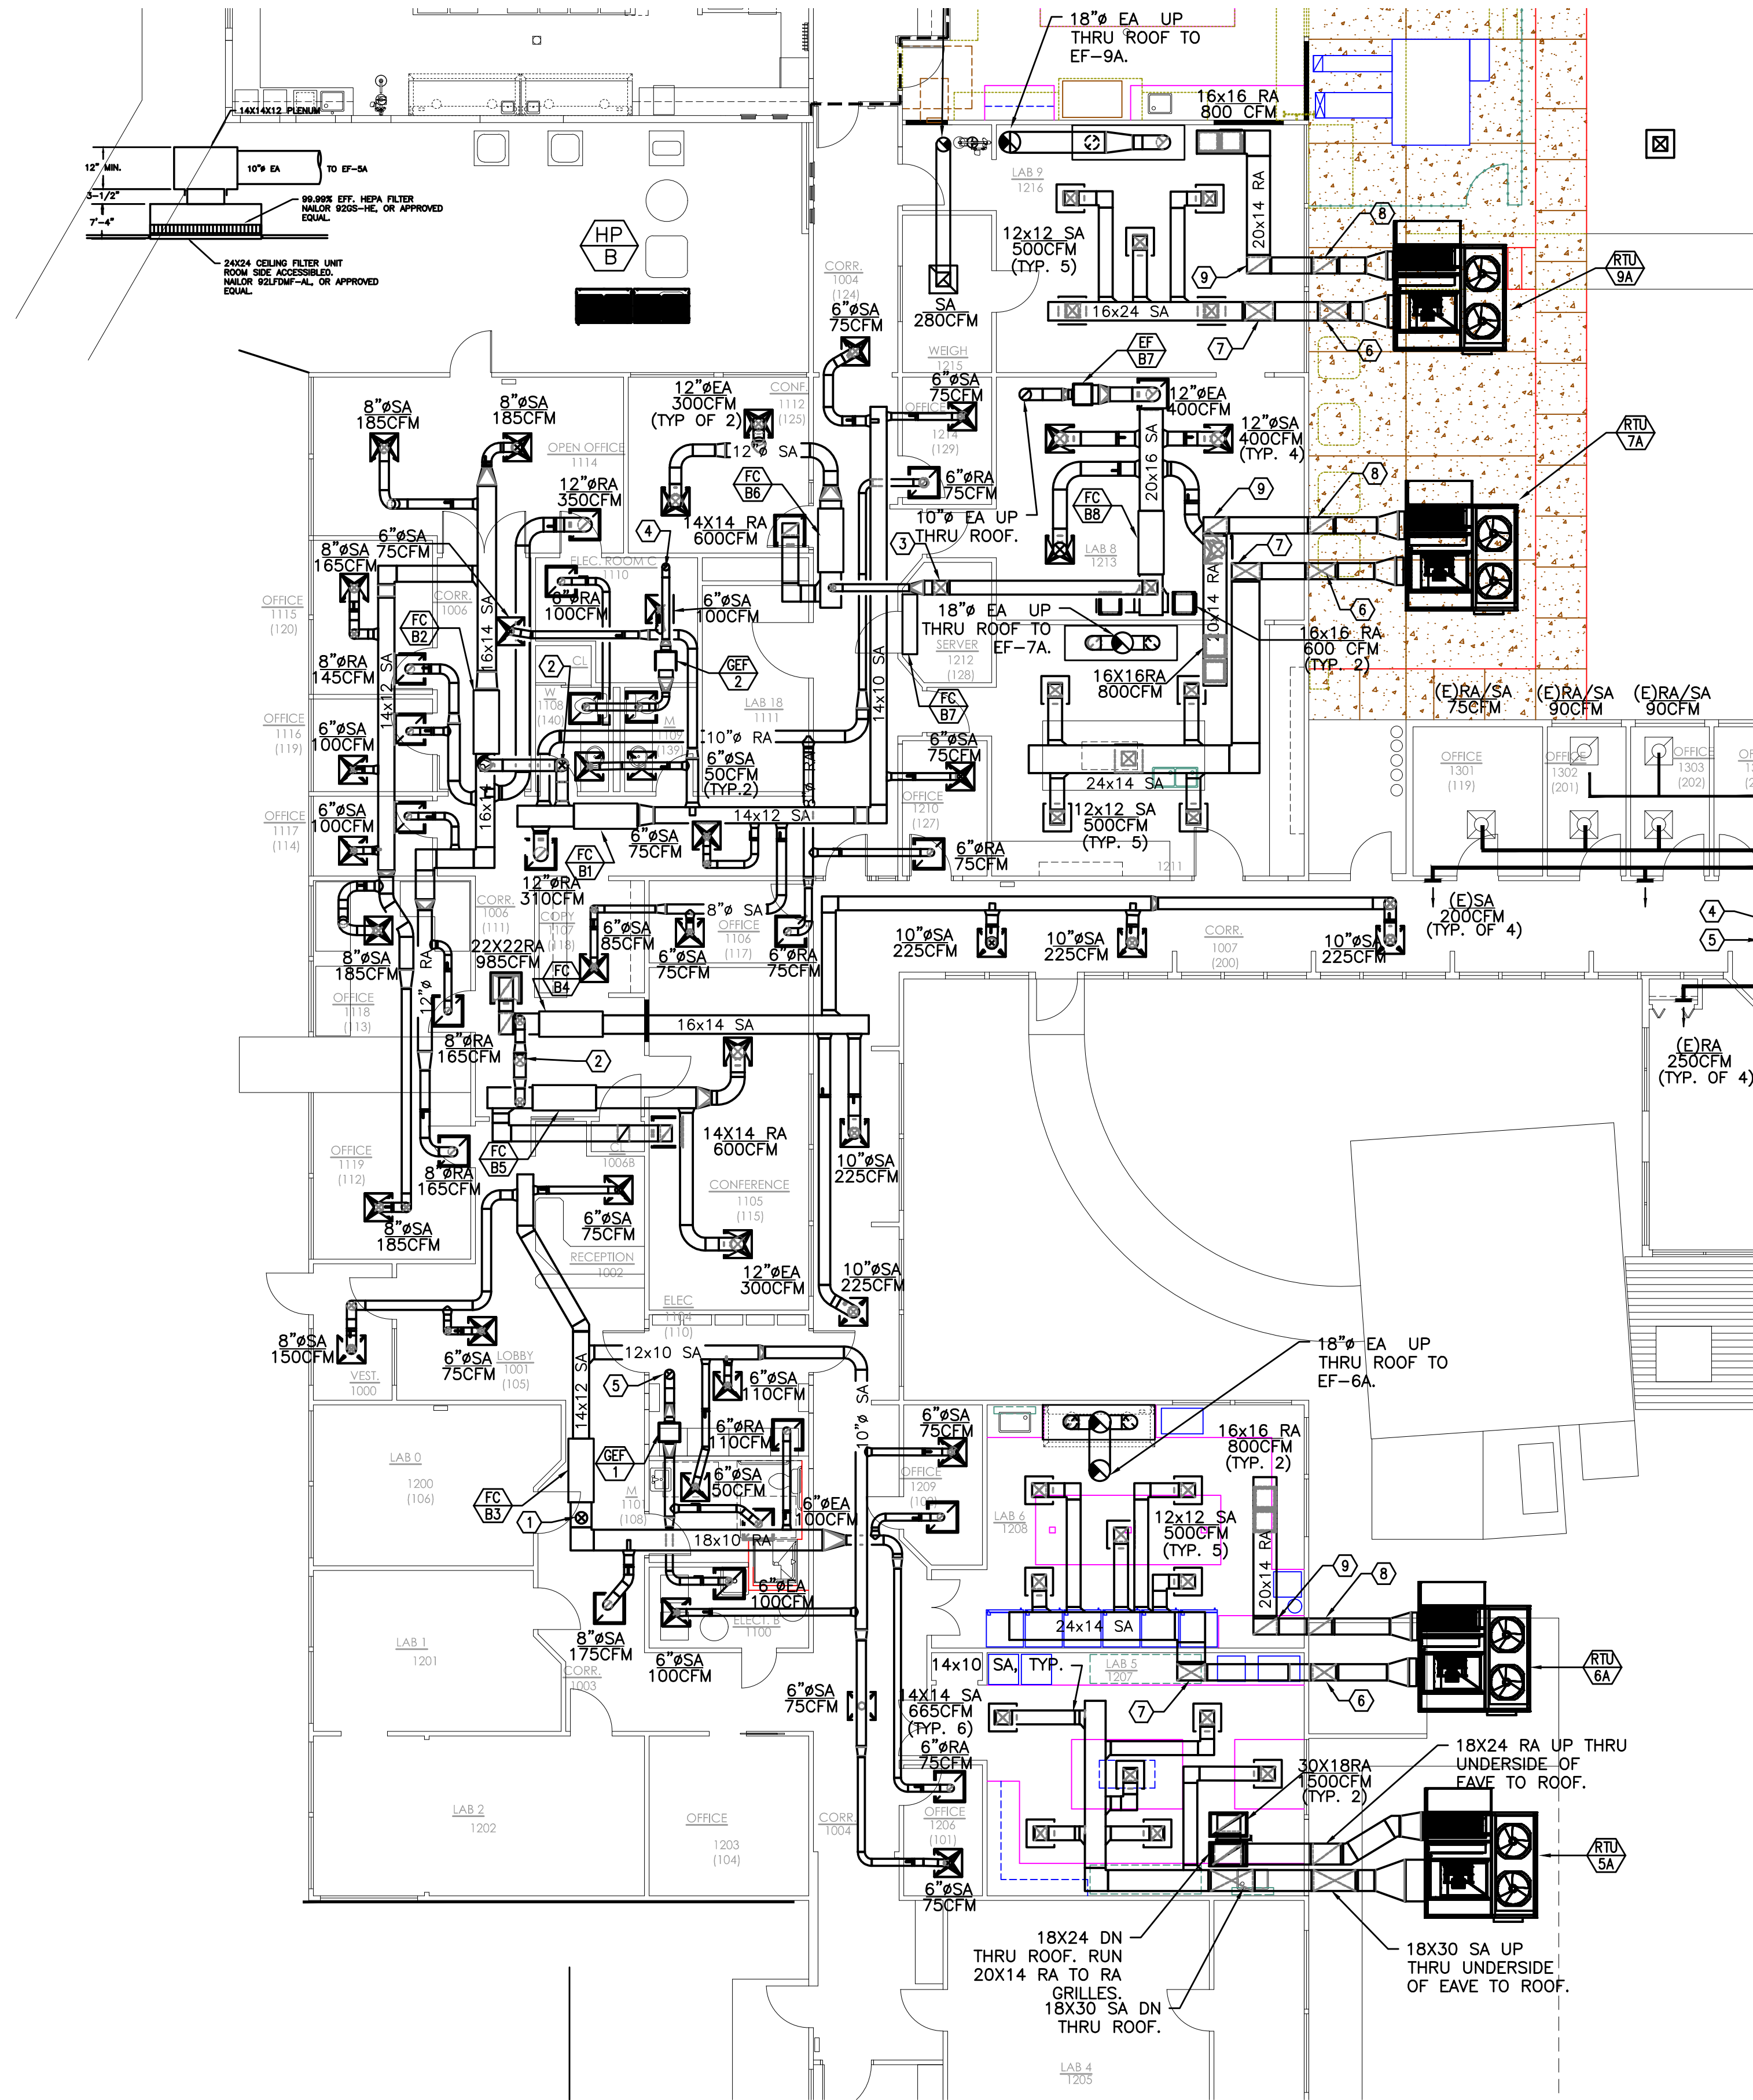

PLAN REVIEW APPROVAL STAMP