

PRELIMINARY
NOT FOR
CONSTRUCTION


IN THE EVENT CONFLICTS ARE DISCOVERED BETWEEN THE ORIGINAL SIGNED AND SEALED DOCUMENTS PREPARED BY THE ARCHITECTS AND/OR THEIR CONSULTANTS, AND ANY COPY OF THE DOCUMENTS TRANSMITTED BY MAIL, FAX, ELECTRONICALLY OR OTHERWISE, THE ORIGINAL SIGNED AND SEALED DOCUMENTS SHALL GOVERN.

PROJECT # 20XX-XX
DATE: 09/29/2019

REVISIONS

SERVER ROOM UPGRADE FOR:
**SALEM-KEIZER SCHOOL DISTRICT
TECHNOLOGY & INFORMATION SERVICES BUILDING**
1340 STATE STREET, SALEM, OREGON 97301

SHEET:
M1.0

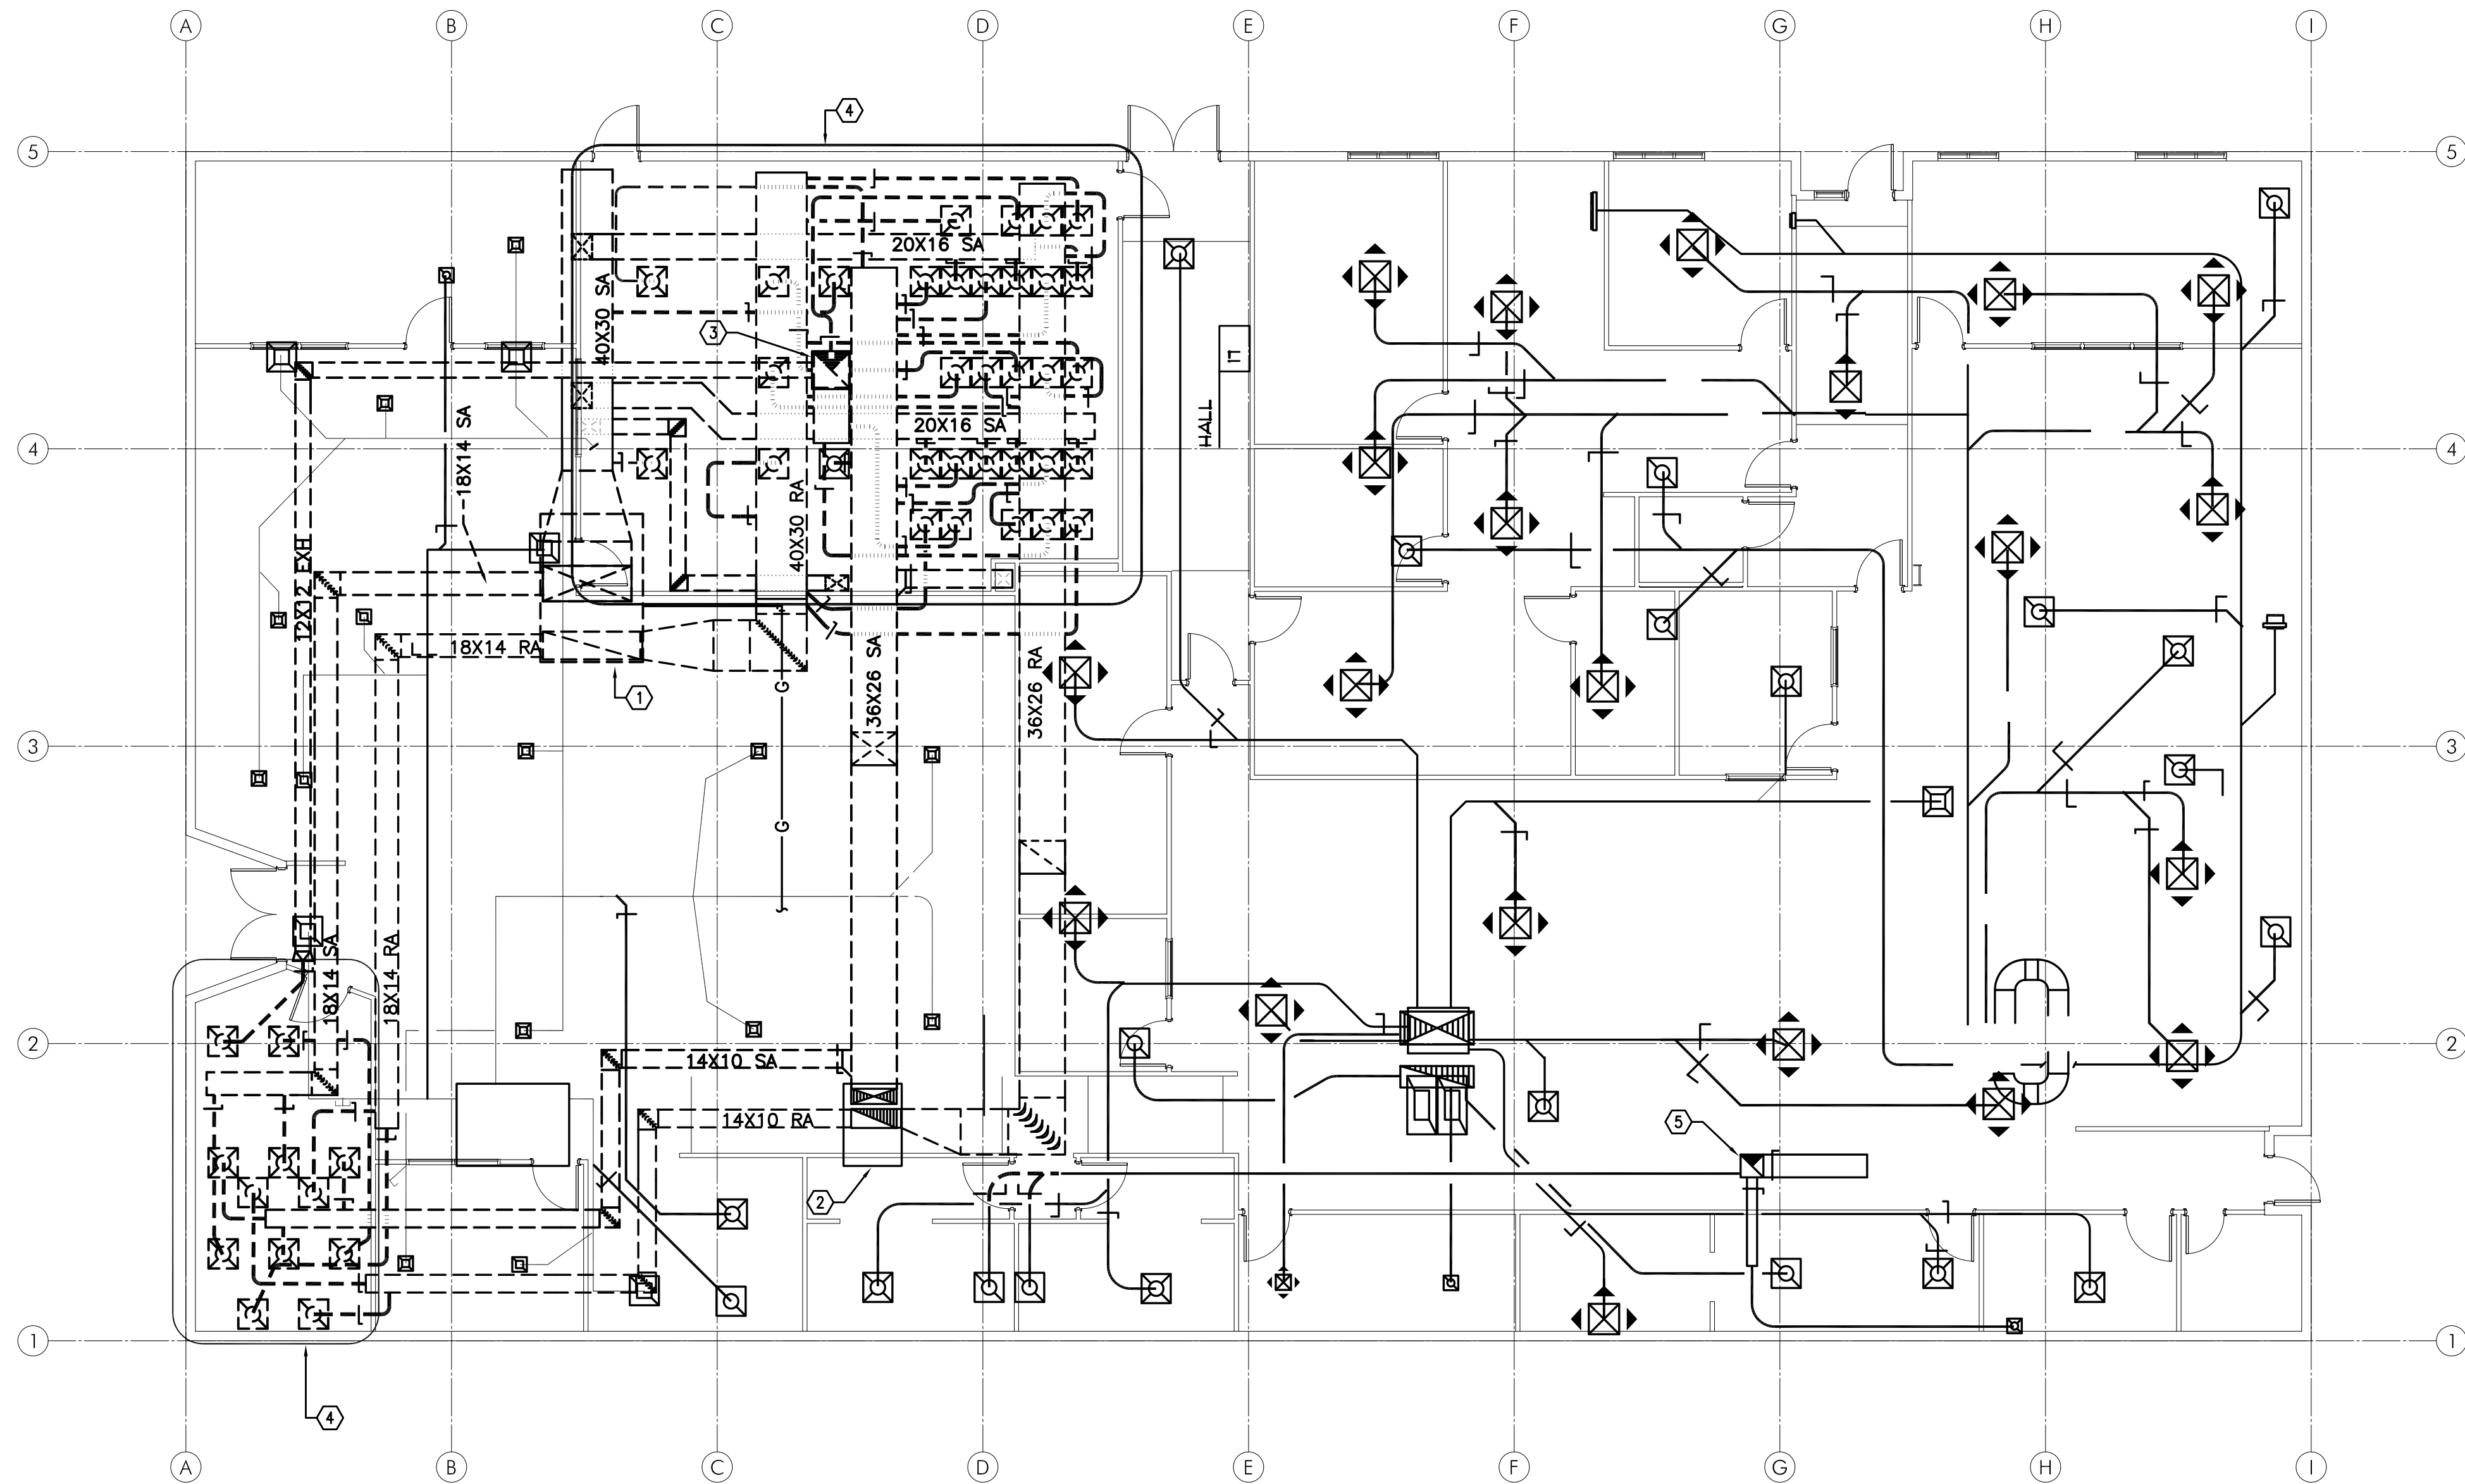

KEYED NOTES: #

1. REMOVE (E)RTU-5 ON ROOF AND RETURN TO OWNER. REMOVE ALL ASSOCIATED CONTROLS. EXISTING CURB TO REMAIN AND BE CAPPED FOR INSTALLATION OF NEW EQUIPMENT
2. (E)15 RTU TO REMAIN FOR FUTURE USE. CAP OFF SA/RA DUCT BELOW ROOF.
3. REMOVE (E)EF-1 AND CAP CURB. REMOVE ALL ASSOCIATED CONTROLS. RETURN UNIT TO OWNER.
4. REMOVE ALL (E)SA/RA/EXH GRILLES AND DUCTWORK IN THIS ROOM.
5. (E)EXH FAN ON ROOF TO REMAIN FOR FUTURE USE.

 **M1.0** MECHANICAL DEMO PLAN
1/8" = 1'-0"