


IN THE EVENT CONFLICTS ARE DISCOVERED  
BETWEEN THE ORIGINAL SIGNED AND SEALED  
DOCUMENTS PREPARED BY THE ARCHITECTS  
AND/OR THEIR CONSULTANTS, AND ANY COPY OF  
THE DOCUMENTS TRANSMITTED BY MAIL, FAX,  
ELECTRONICALLY OR OTHERWISE, THE ORIGINAL  
SIGNED AND SEALED DOCUMENTS SHALL GOVERN.

PROJECT # 2017-053  
DATE: 10/31/2022


REVISIONS

# AEGIS - PHASE II MIXED-USE DEVELOPMENT


312 E EVERGREEN BOULEVARD, VANCOUVER, WA 98660

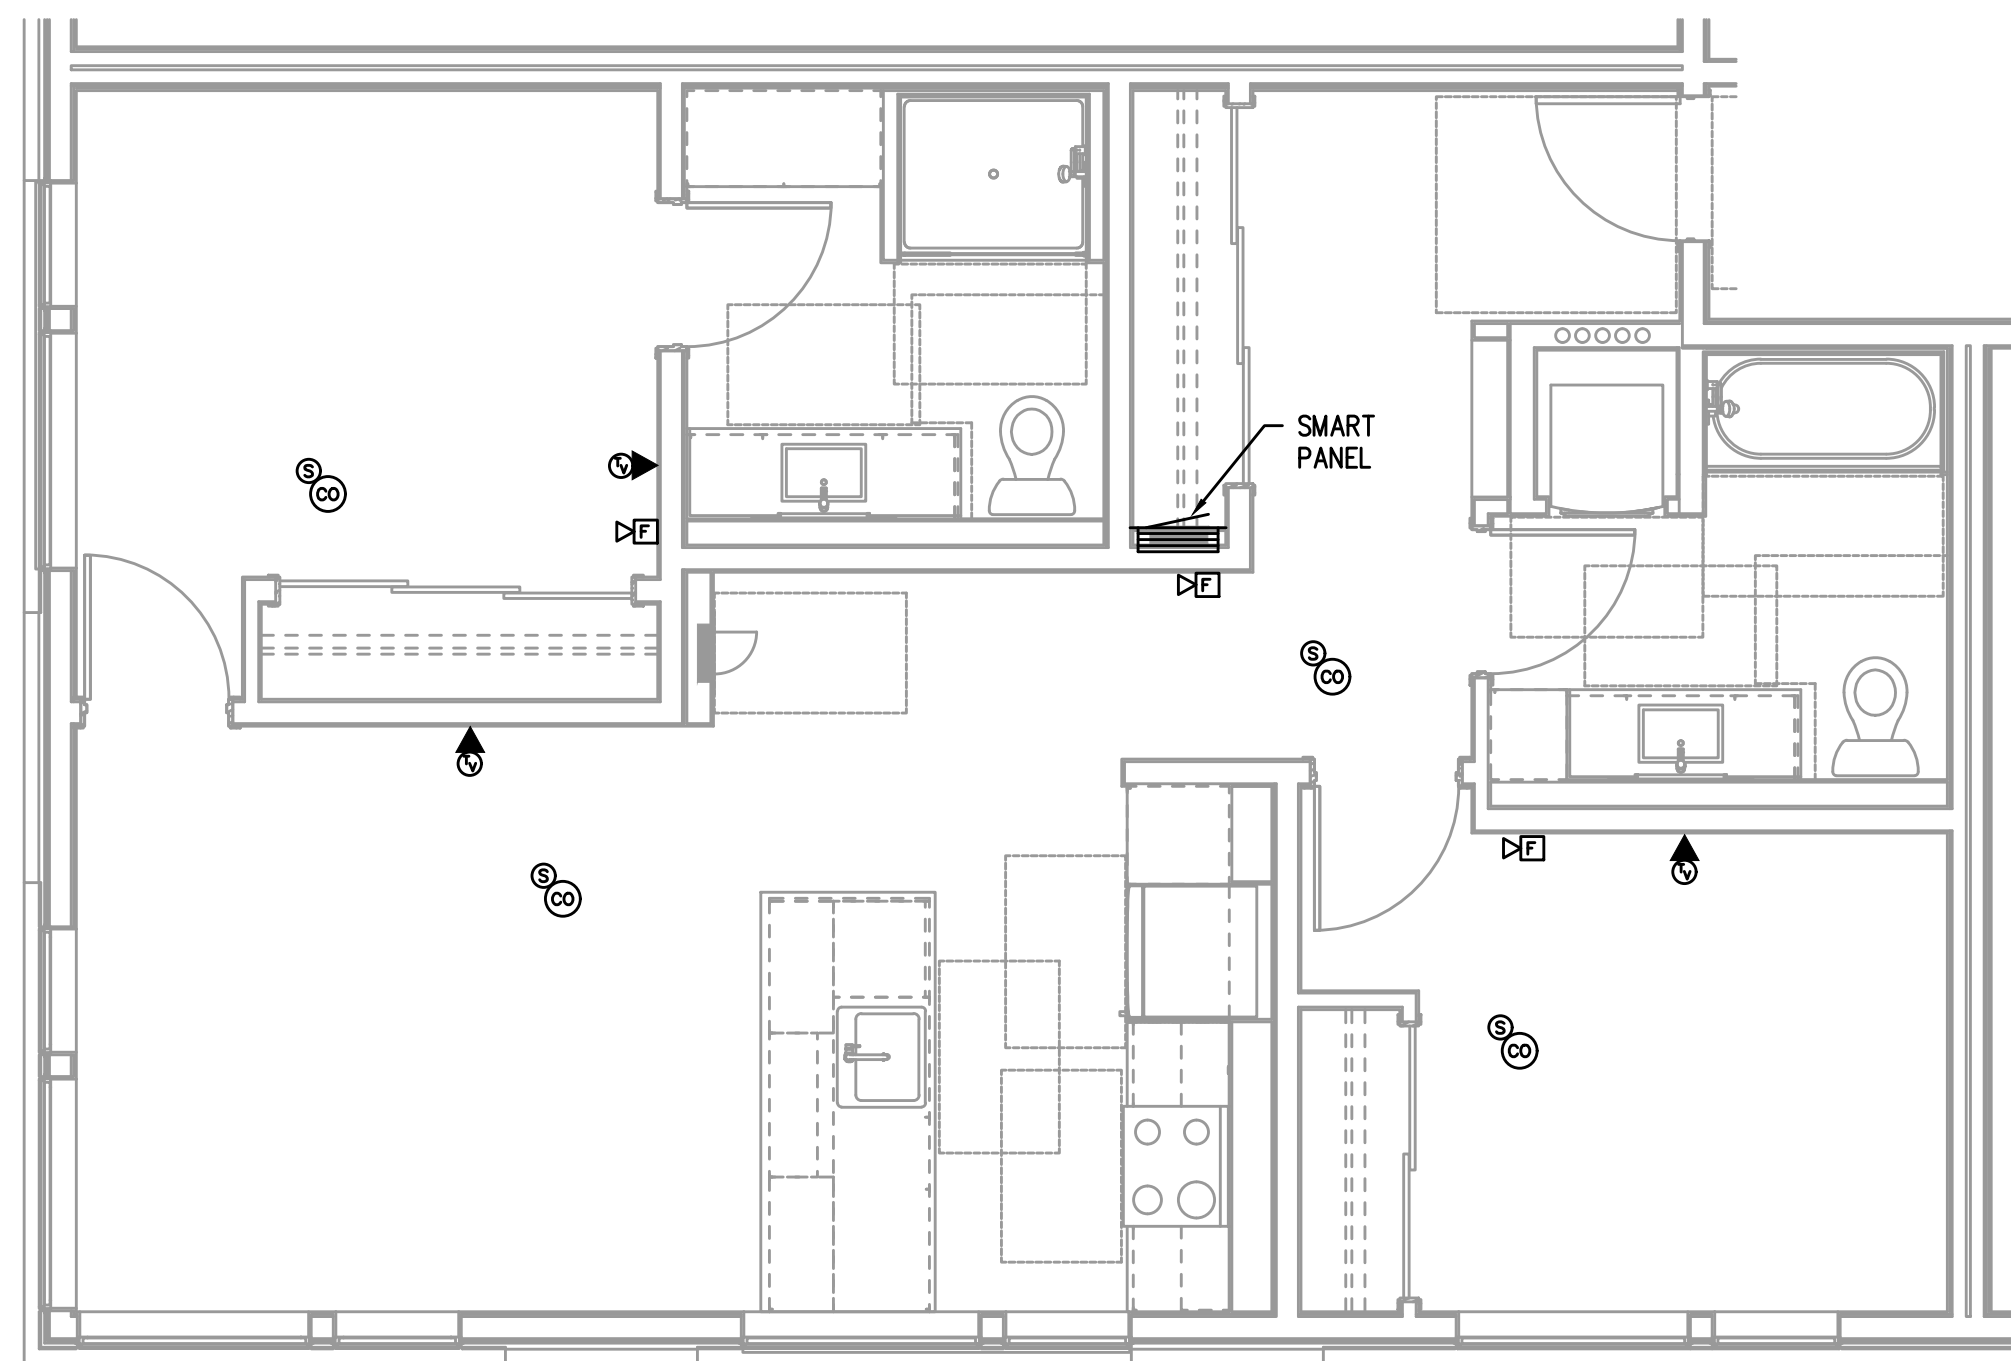


1  
T4.01  
TYPICAL UNIT TYPE E  
2 BED/1 BATH - TECHNOLOGY PLAN  
SCALE: 1/4" = 1'-0"

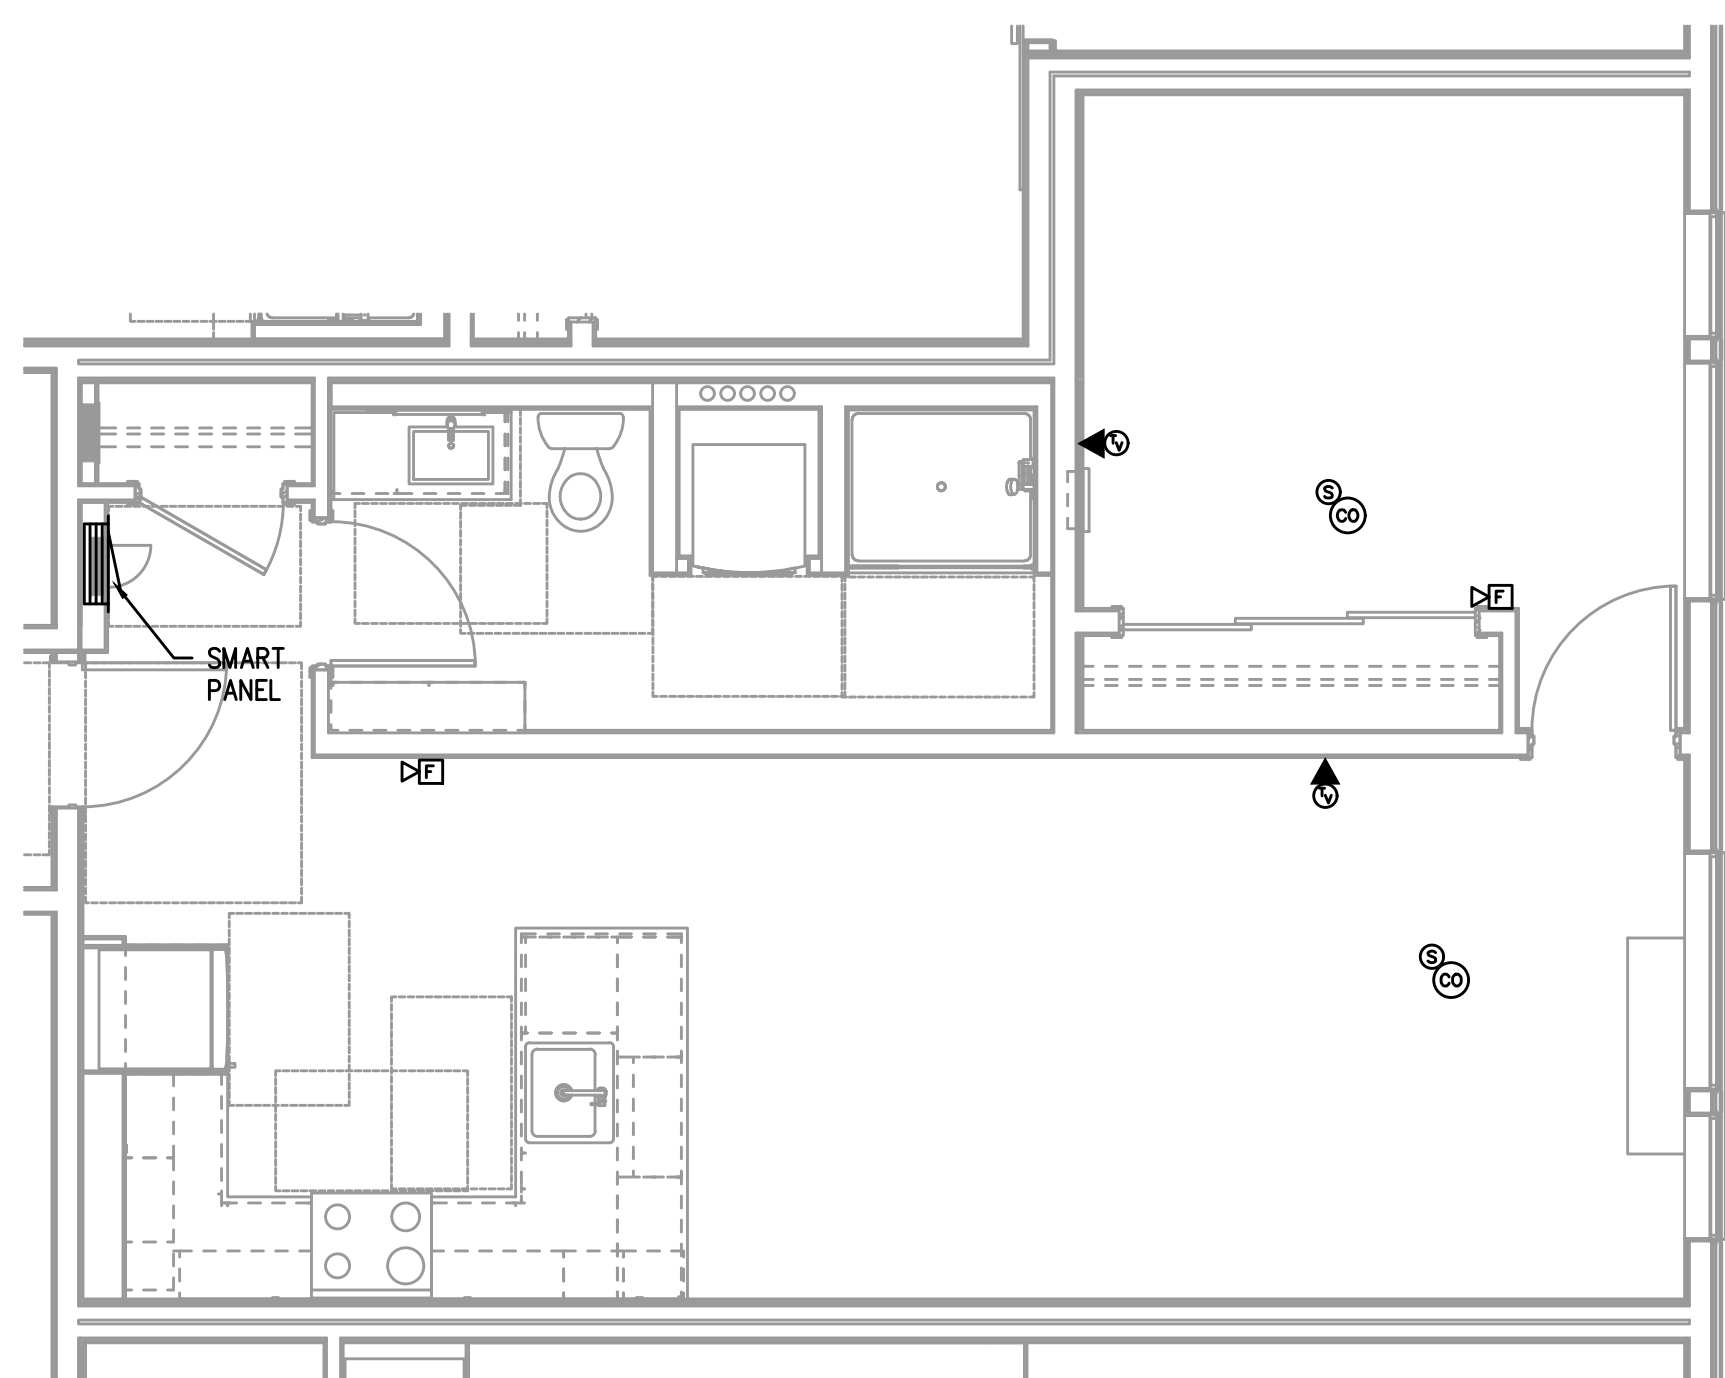

2  
T4.01  
TYPICAL UNIT TYPE F  
1 BED/1 BATH - TECHNOLOGY PLAN  
SCALE: 1/4" = 1'-0"

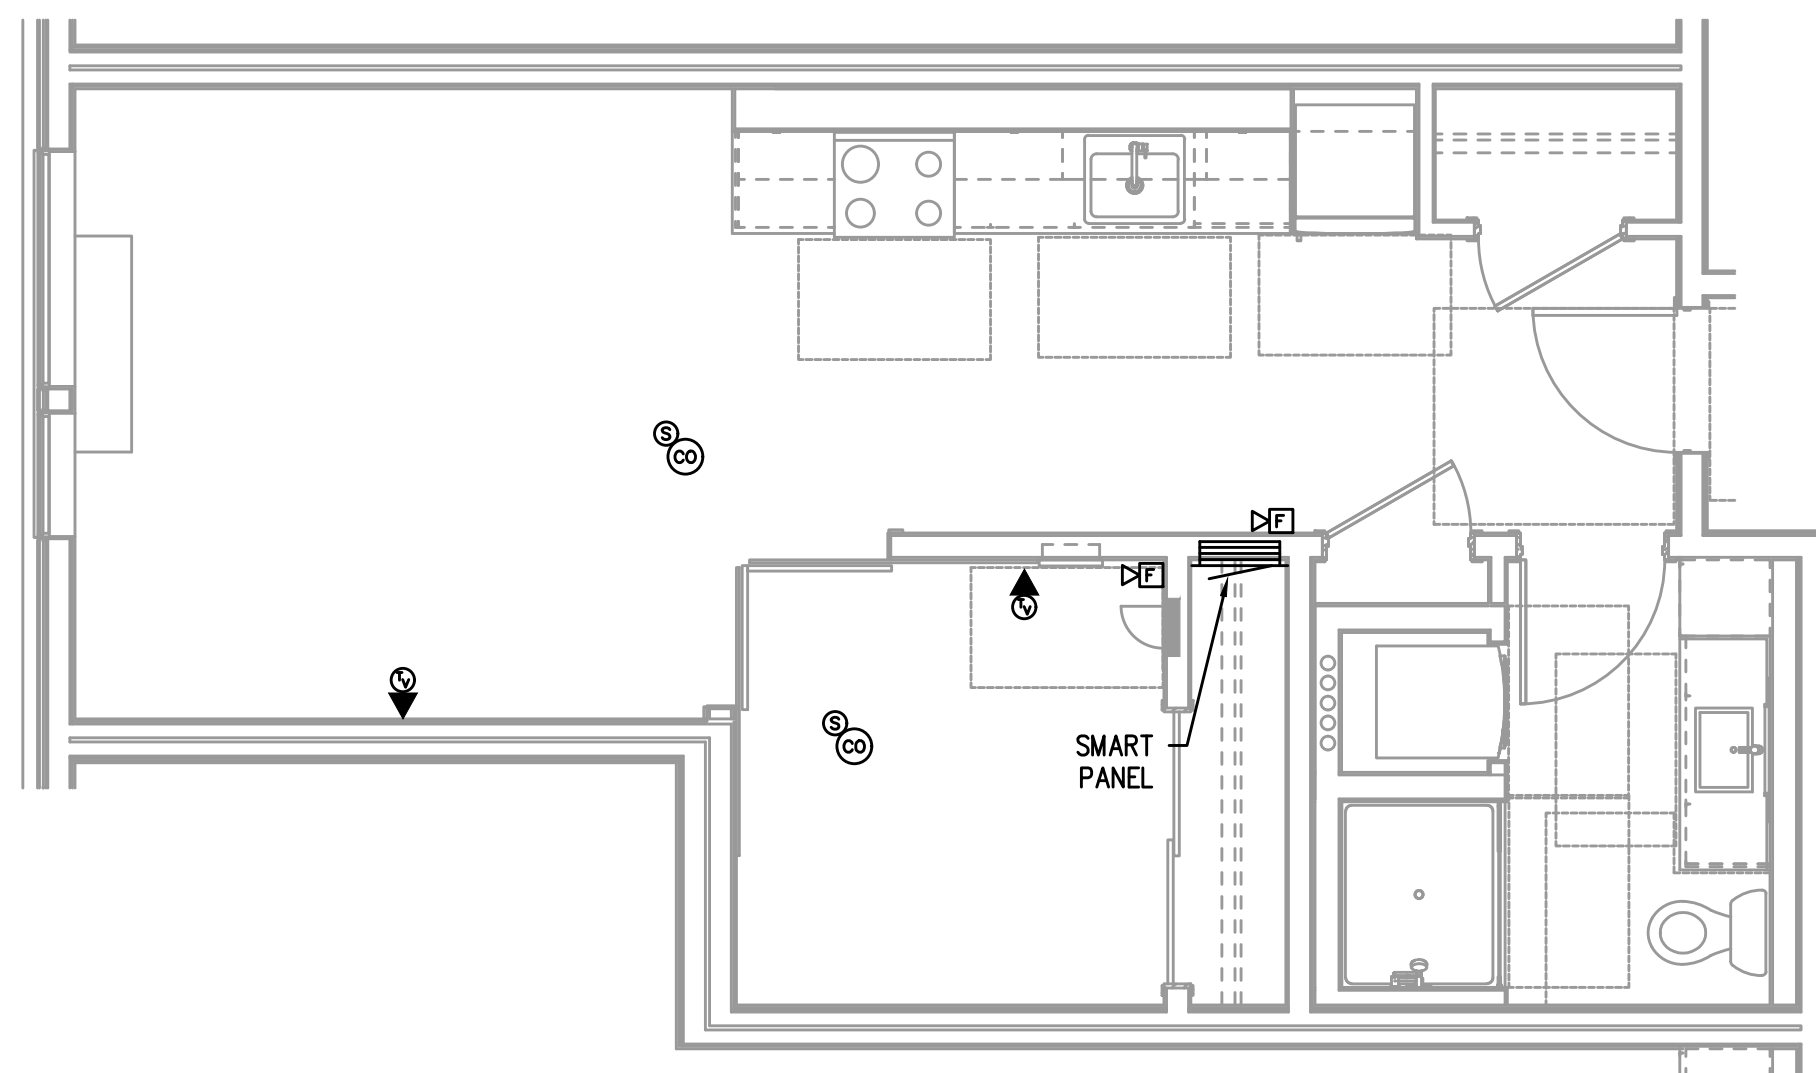

3  
T4.01  
TYPICAL UNIT TYPE G  
1 BED/1 BATH - TECHNOLOGY PLAN  
SCALE: 1/4" = 1'-0"

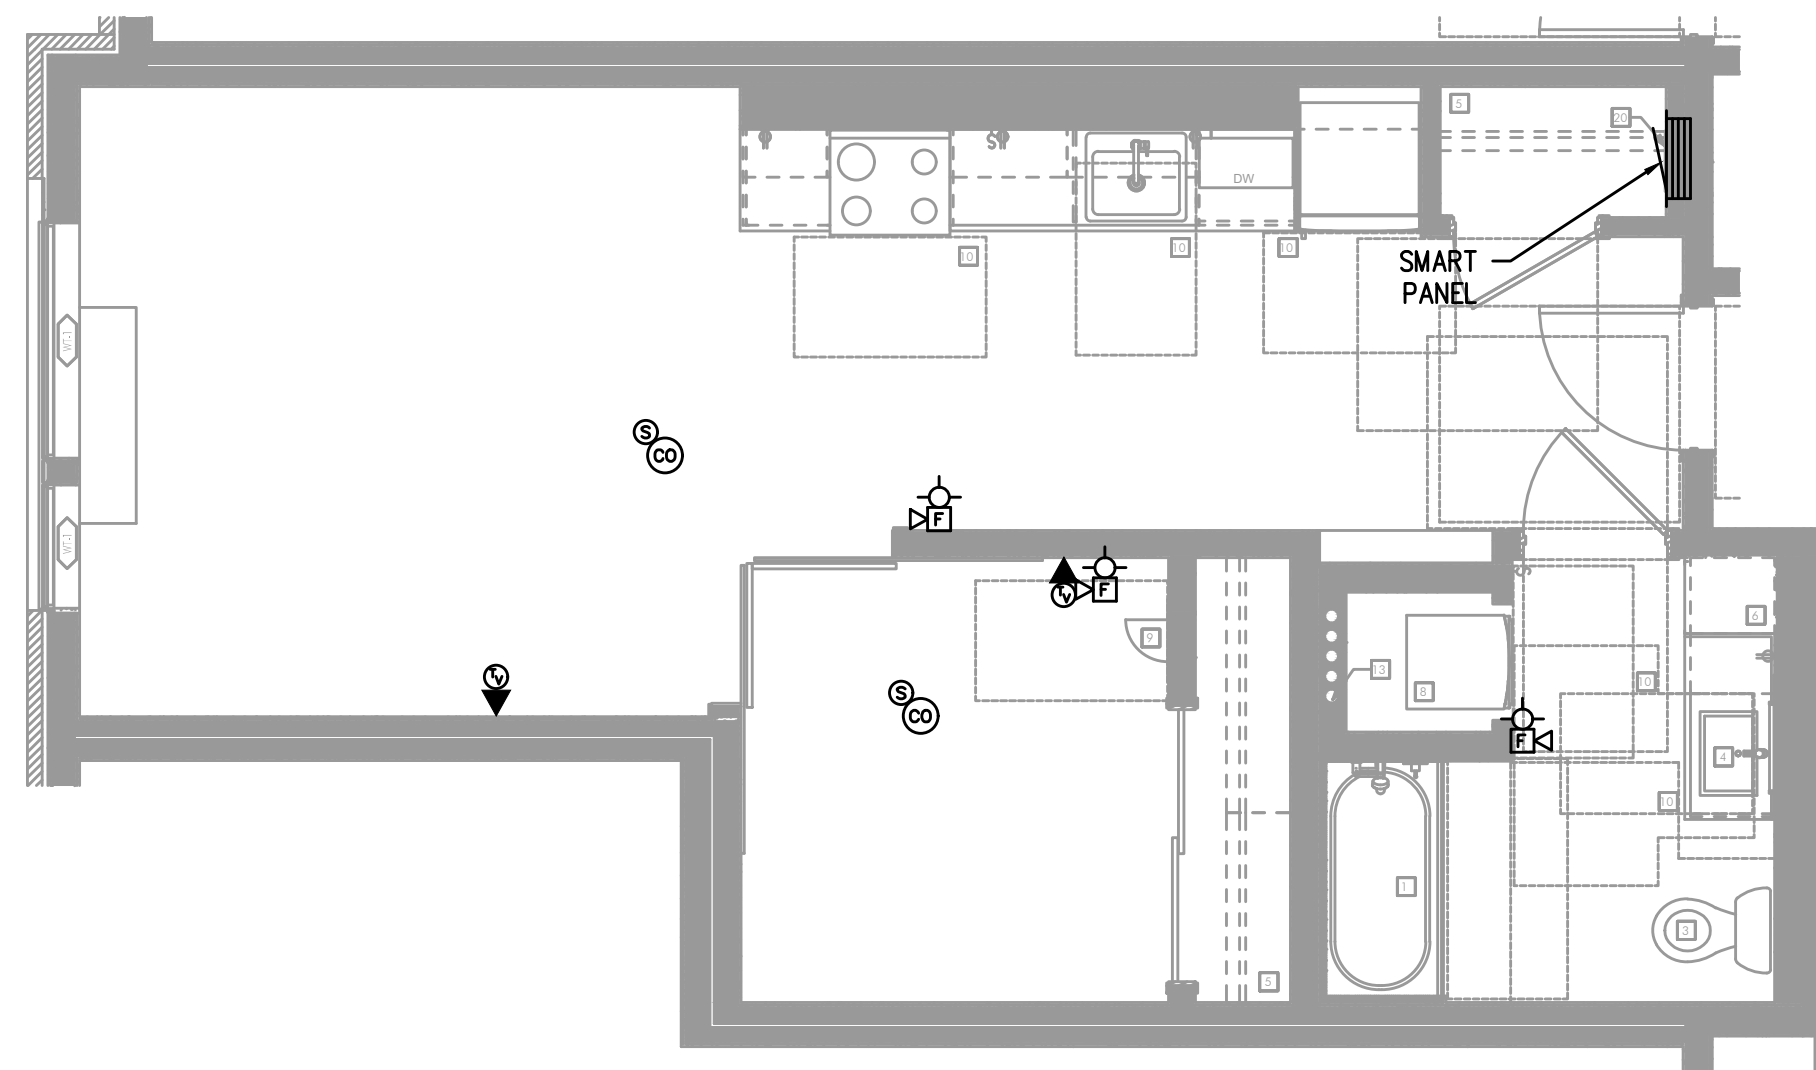

4  
T4.01  
TYPICAL UNIT TYPE G - ADA  
1 BED/1 BATH - TECHNOLOGY PLAN  
SCALE: 1/4" = 1'-0"

## GENERAL NOTES:

- DRAWINGS ARE DIAGRAMMATICAL AND MAY NOT ACCURATELY REFLECT ACTUAL CONSTRUCTION CONDITIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE INSTALLATION OF ALL EQUIPMENT THEY ARE INSTALLING, WITH ALL TRADES PRIOR TO AND DURING CONSTRUCTION.
- VOICE/CATV OUTLET SHALL BE AT THE SAME HEIGHT AS ADJACENT POWER OUTLET AND LESS THAN 6" SEPARATION. COORDINATE WITH ELECTRICAL.
- COORDINATE ALL DEVICE LOCATIONS WITH LATEST ARCHITECTURAL INTERIOR ELEVATIONS TO VERIFY DEVICES WILL NOT BE OBSTRUCTED.
- ALL PENETRATIONS THROUGH FIREWALLS WILL NEED FIRESTOP OF THE APPROPRIATE RATING.
- HORN AND/OR HORN-STROBE DEVICES CONNECT TO BUILDING FIRE ALARM SYSTEM.
- INSTALL STAND-ALONE SMOKE AND CO DETECTORS PER RESIDENTIAL CODE 907.
- 'SMART PANEL' SHALL BE RF TRANSPARENT AND NOT LESS THE 40" IN HEIGHT.

**M**  
**F**  
**I**  
**A**  
**INC.**  
Consulting Engineers  
2007 S.E. Ash St.  
Portland, OR 97214  
PHN: (503) 234-0548  
FAX: (503) 234-0677  
CONTACT: GARY ADOVNIK

SHEET:

T4.01