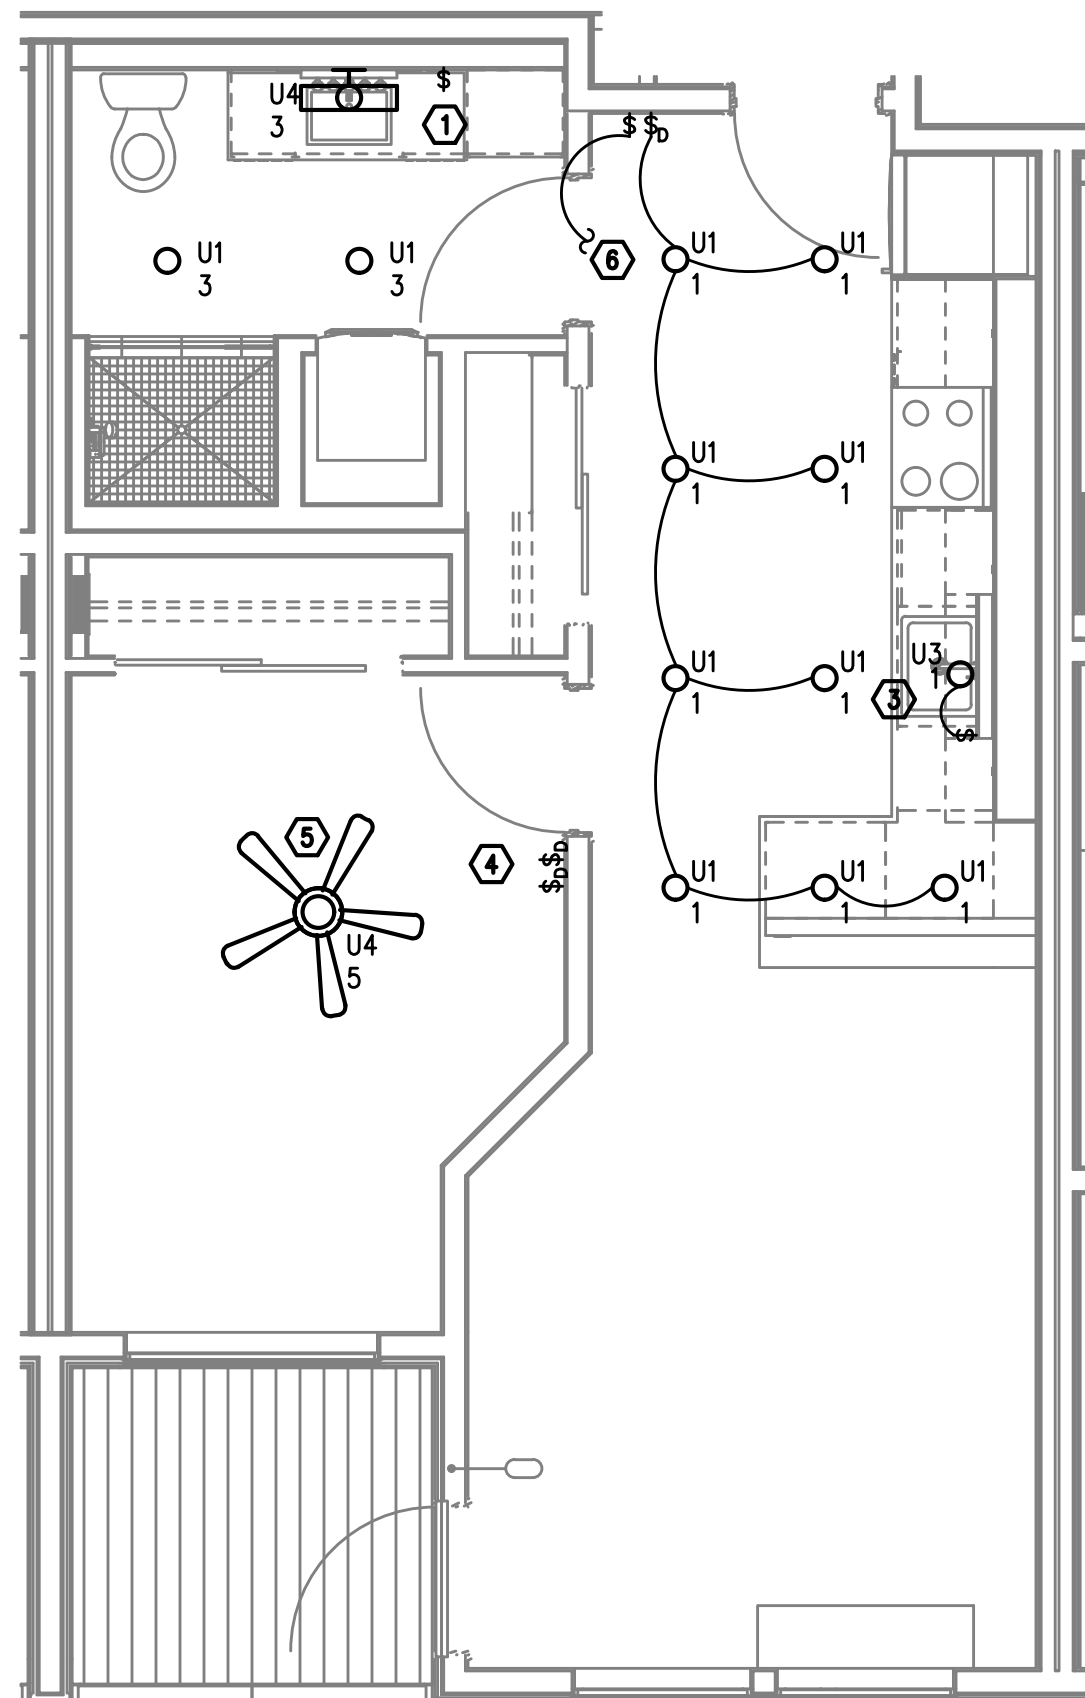
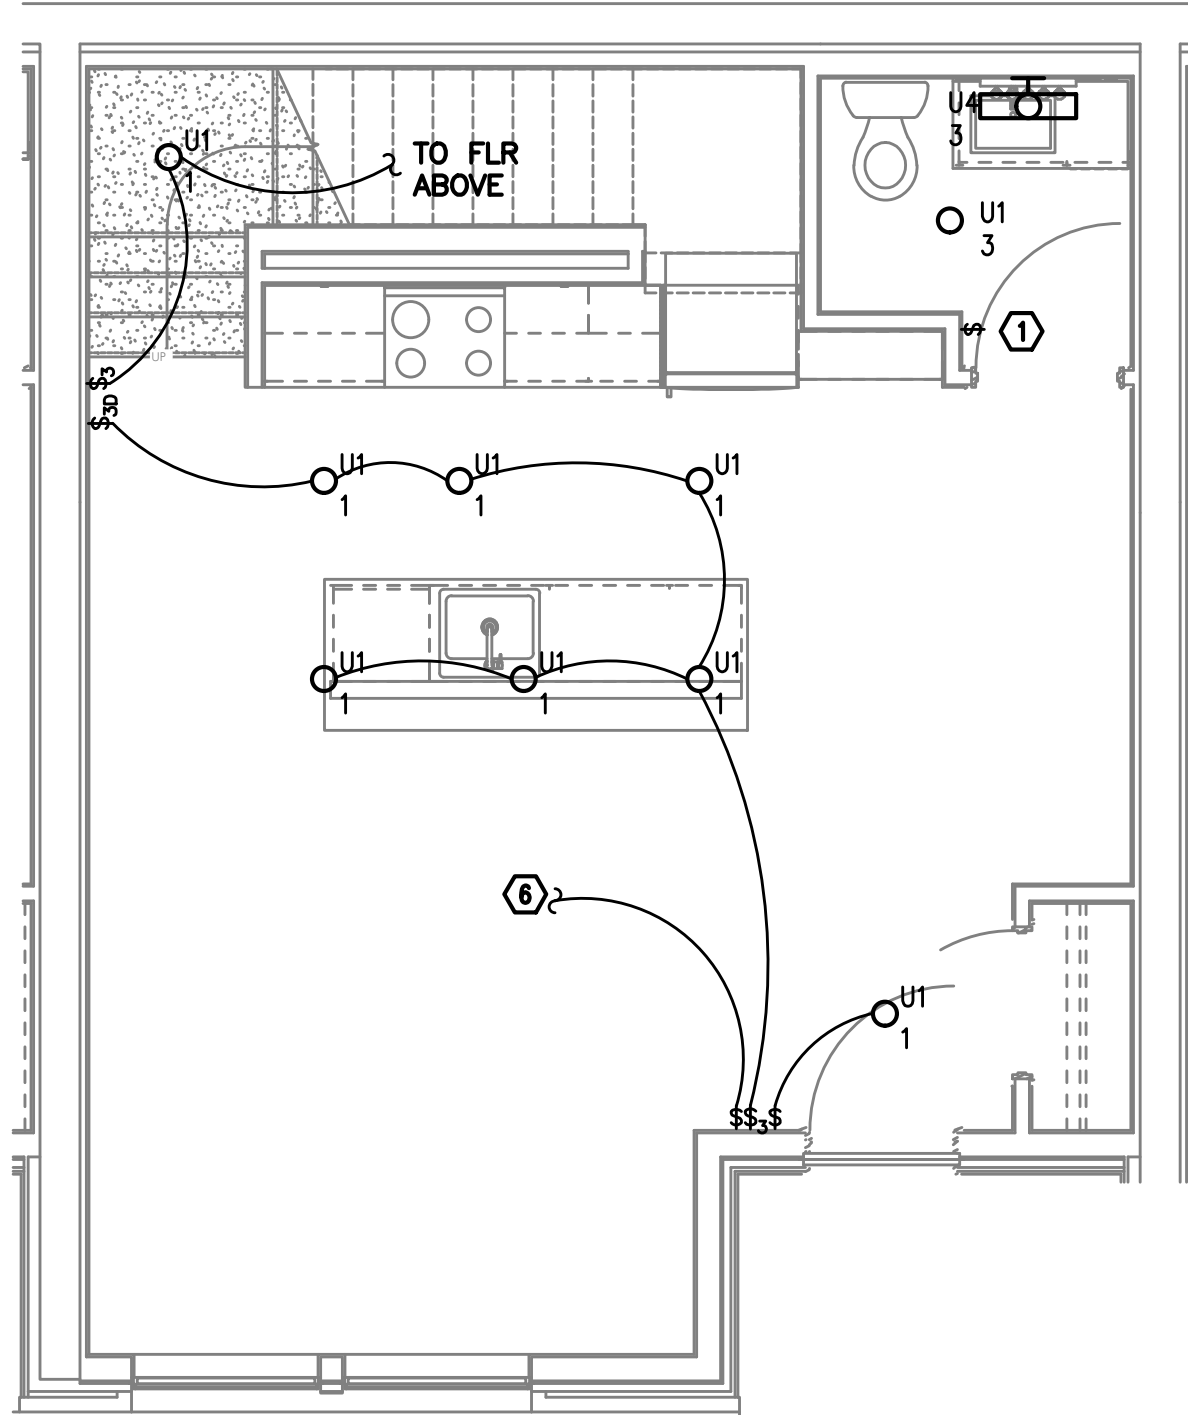
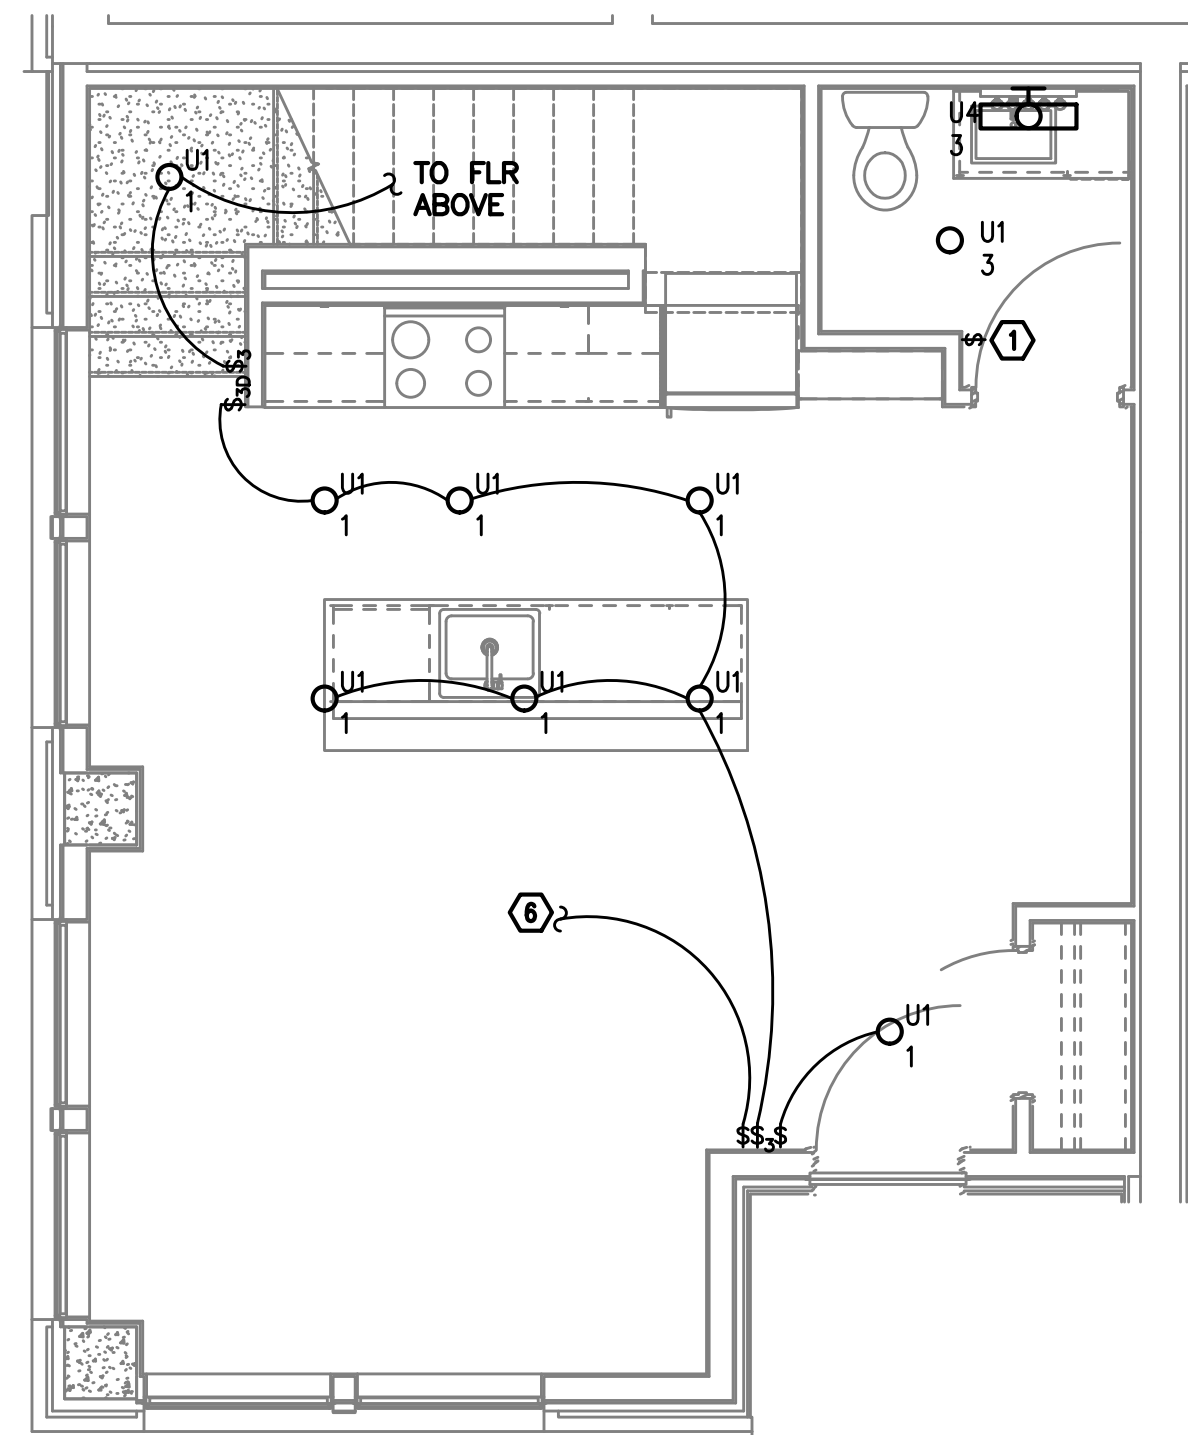
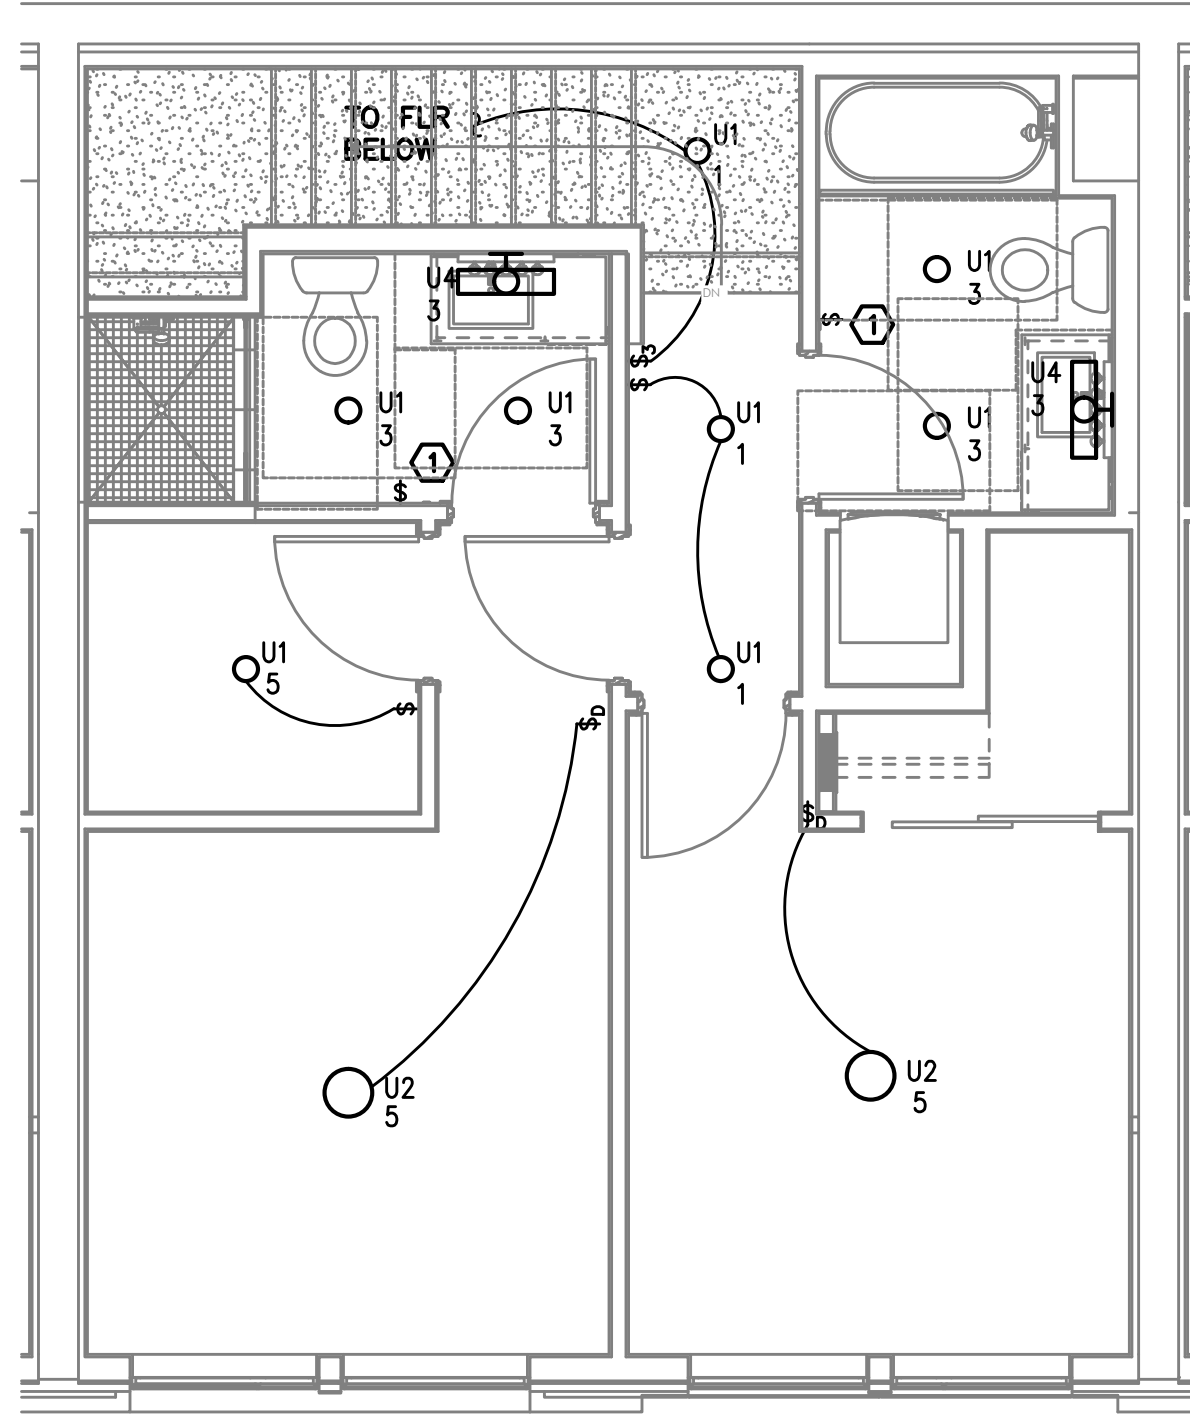
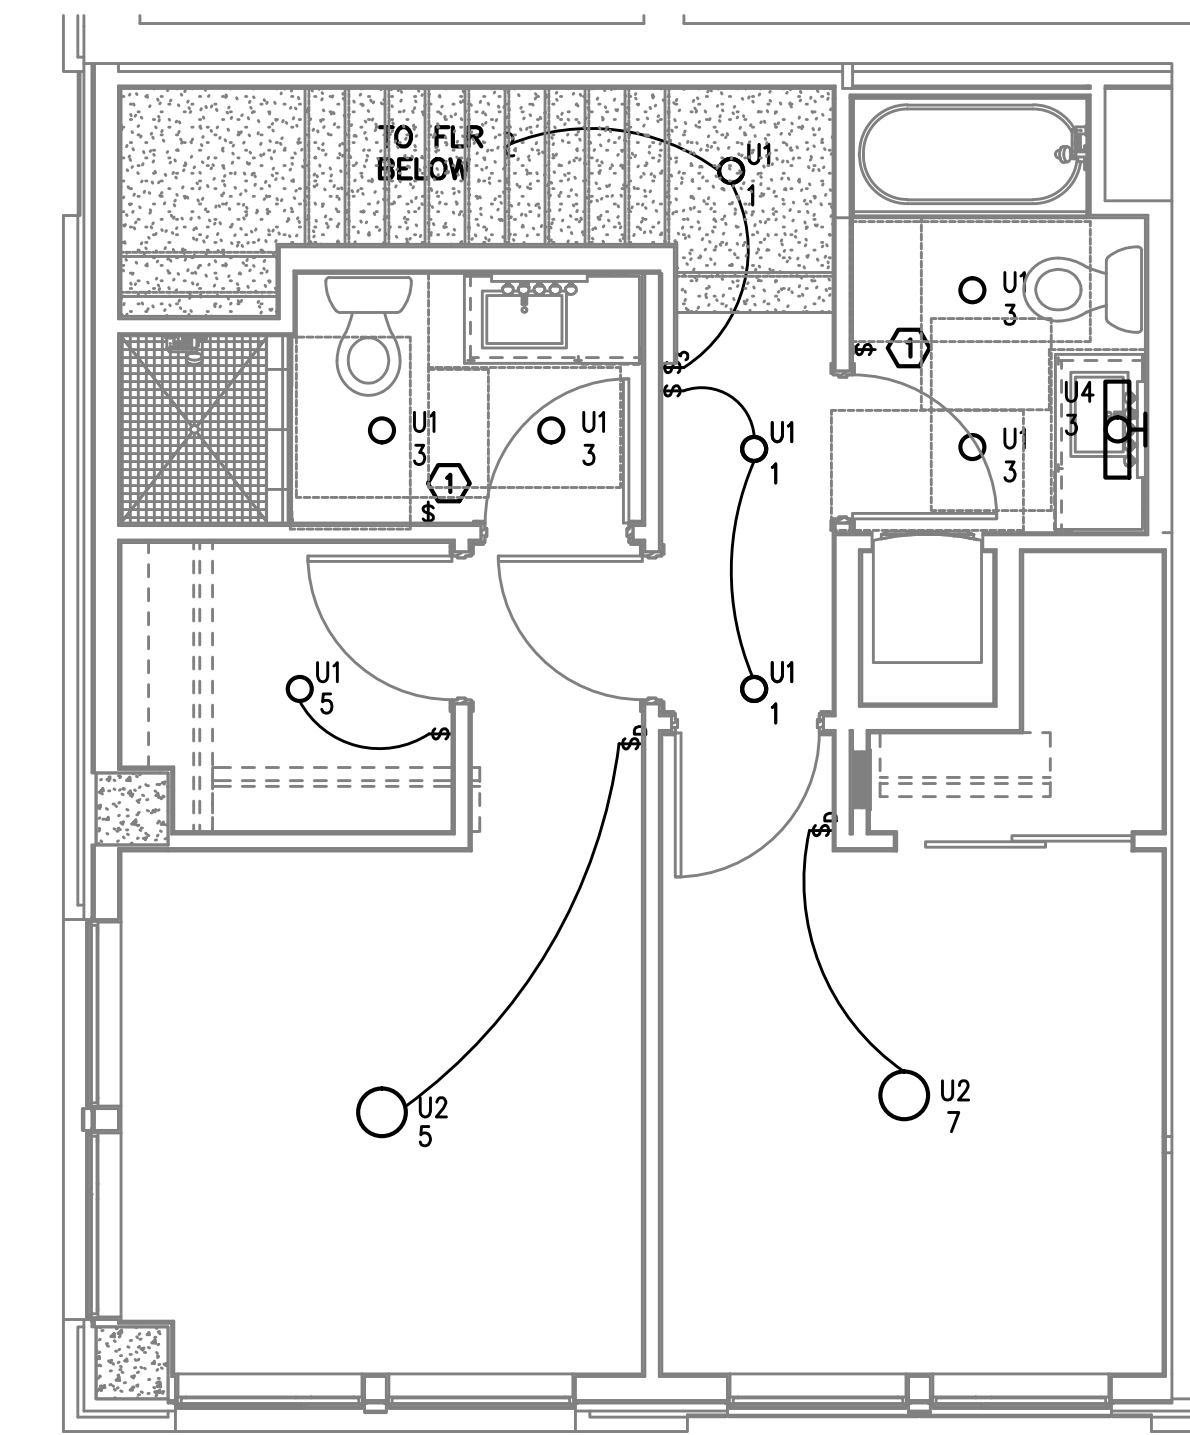


GENERAL NOTES:

- ALL PLANS ARE DIAGRAMMATICAL. CONSULT ARCHITECTURAL PLANS FOR EXACT LOCATION OF ALL DEVICES AND FIXTURES.
- REFER TO SHEET E1.14 FOR TYPICAL UNIT LOAD CENTER DIRECTORIES.
- ALL LIGHT SWITCHES SHALL BE DIMMER STYLE, SUCH AS LEVITON DECORA, OR APPROVED EQUAL, UNLESS OTHERWISE NOTED.
- REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT FIXTURE LOCATIONS AND MOUNTING HEIGHTS.

KEYED NOTES:

- REFER TO TYPICAL BATHROOM SWITCHING DETAILS ON SHEET E1.22.
- LOCATE SWITCH FOR SINK LIGHT IN CABINET FALSE FRONT.
- REFER TO ARCHITECTURAL INTERIOR ELEVATIONS FOR LOCATION AND MOUNTING OF UNDER CABINET LIGHTS.
- SWITCHING FOR CEILING FAN SHALL BE MANUFACTURER'S RECOMMENDATION FOR LIGHT AND FAN CONTROL.
- PROVIDE BLOCKING AT CEILING TO SUPPORT 35LB., MINIMUM, FOR CEILING FAN INSTALLATION. REFER TO MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR ADDITIONAL INFORMATION AND REQUIREMENTS.
- TO SWITCHED RECEPTACLE IN LIVING ROOM. REFER TO E4.1 SERIES SHEETS FOR LOCATION.

1 UNIT TYPE 'D' - LIGHTING PLAN
E4.02 1/4" = 1'-0"2 UNIT TYPE 'E' LEVEL 1
LIGHTING PLAN
E4.02 1/4" = 1'-0"4 UNIT TYPE 'F' LEVEL 1
LIGHTING PLAN
E4.02 1/4" = 1'-0"3 UNIT TYPE 'E' LEVEL 2
LIGHTING PLAN
E4.02 1/4" = 1'-0"5 UNIT TYPE 'F' LEVEL 2
LIGHTING PLAN
E4.02 1/4" = 1'-0"