


1 UNIT TYPE 'L' — LIGHTING PLAN
E4.04 1/4" = 1'-0"

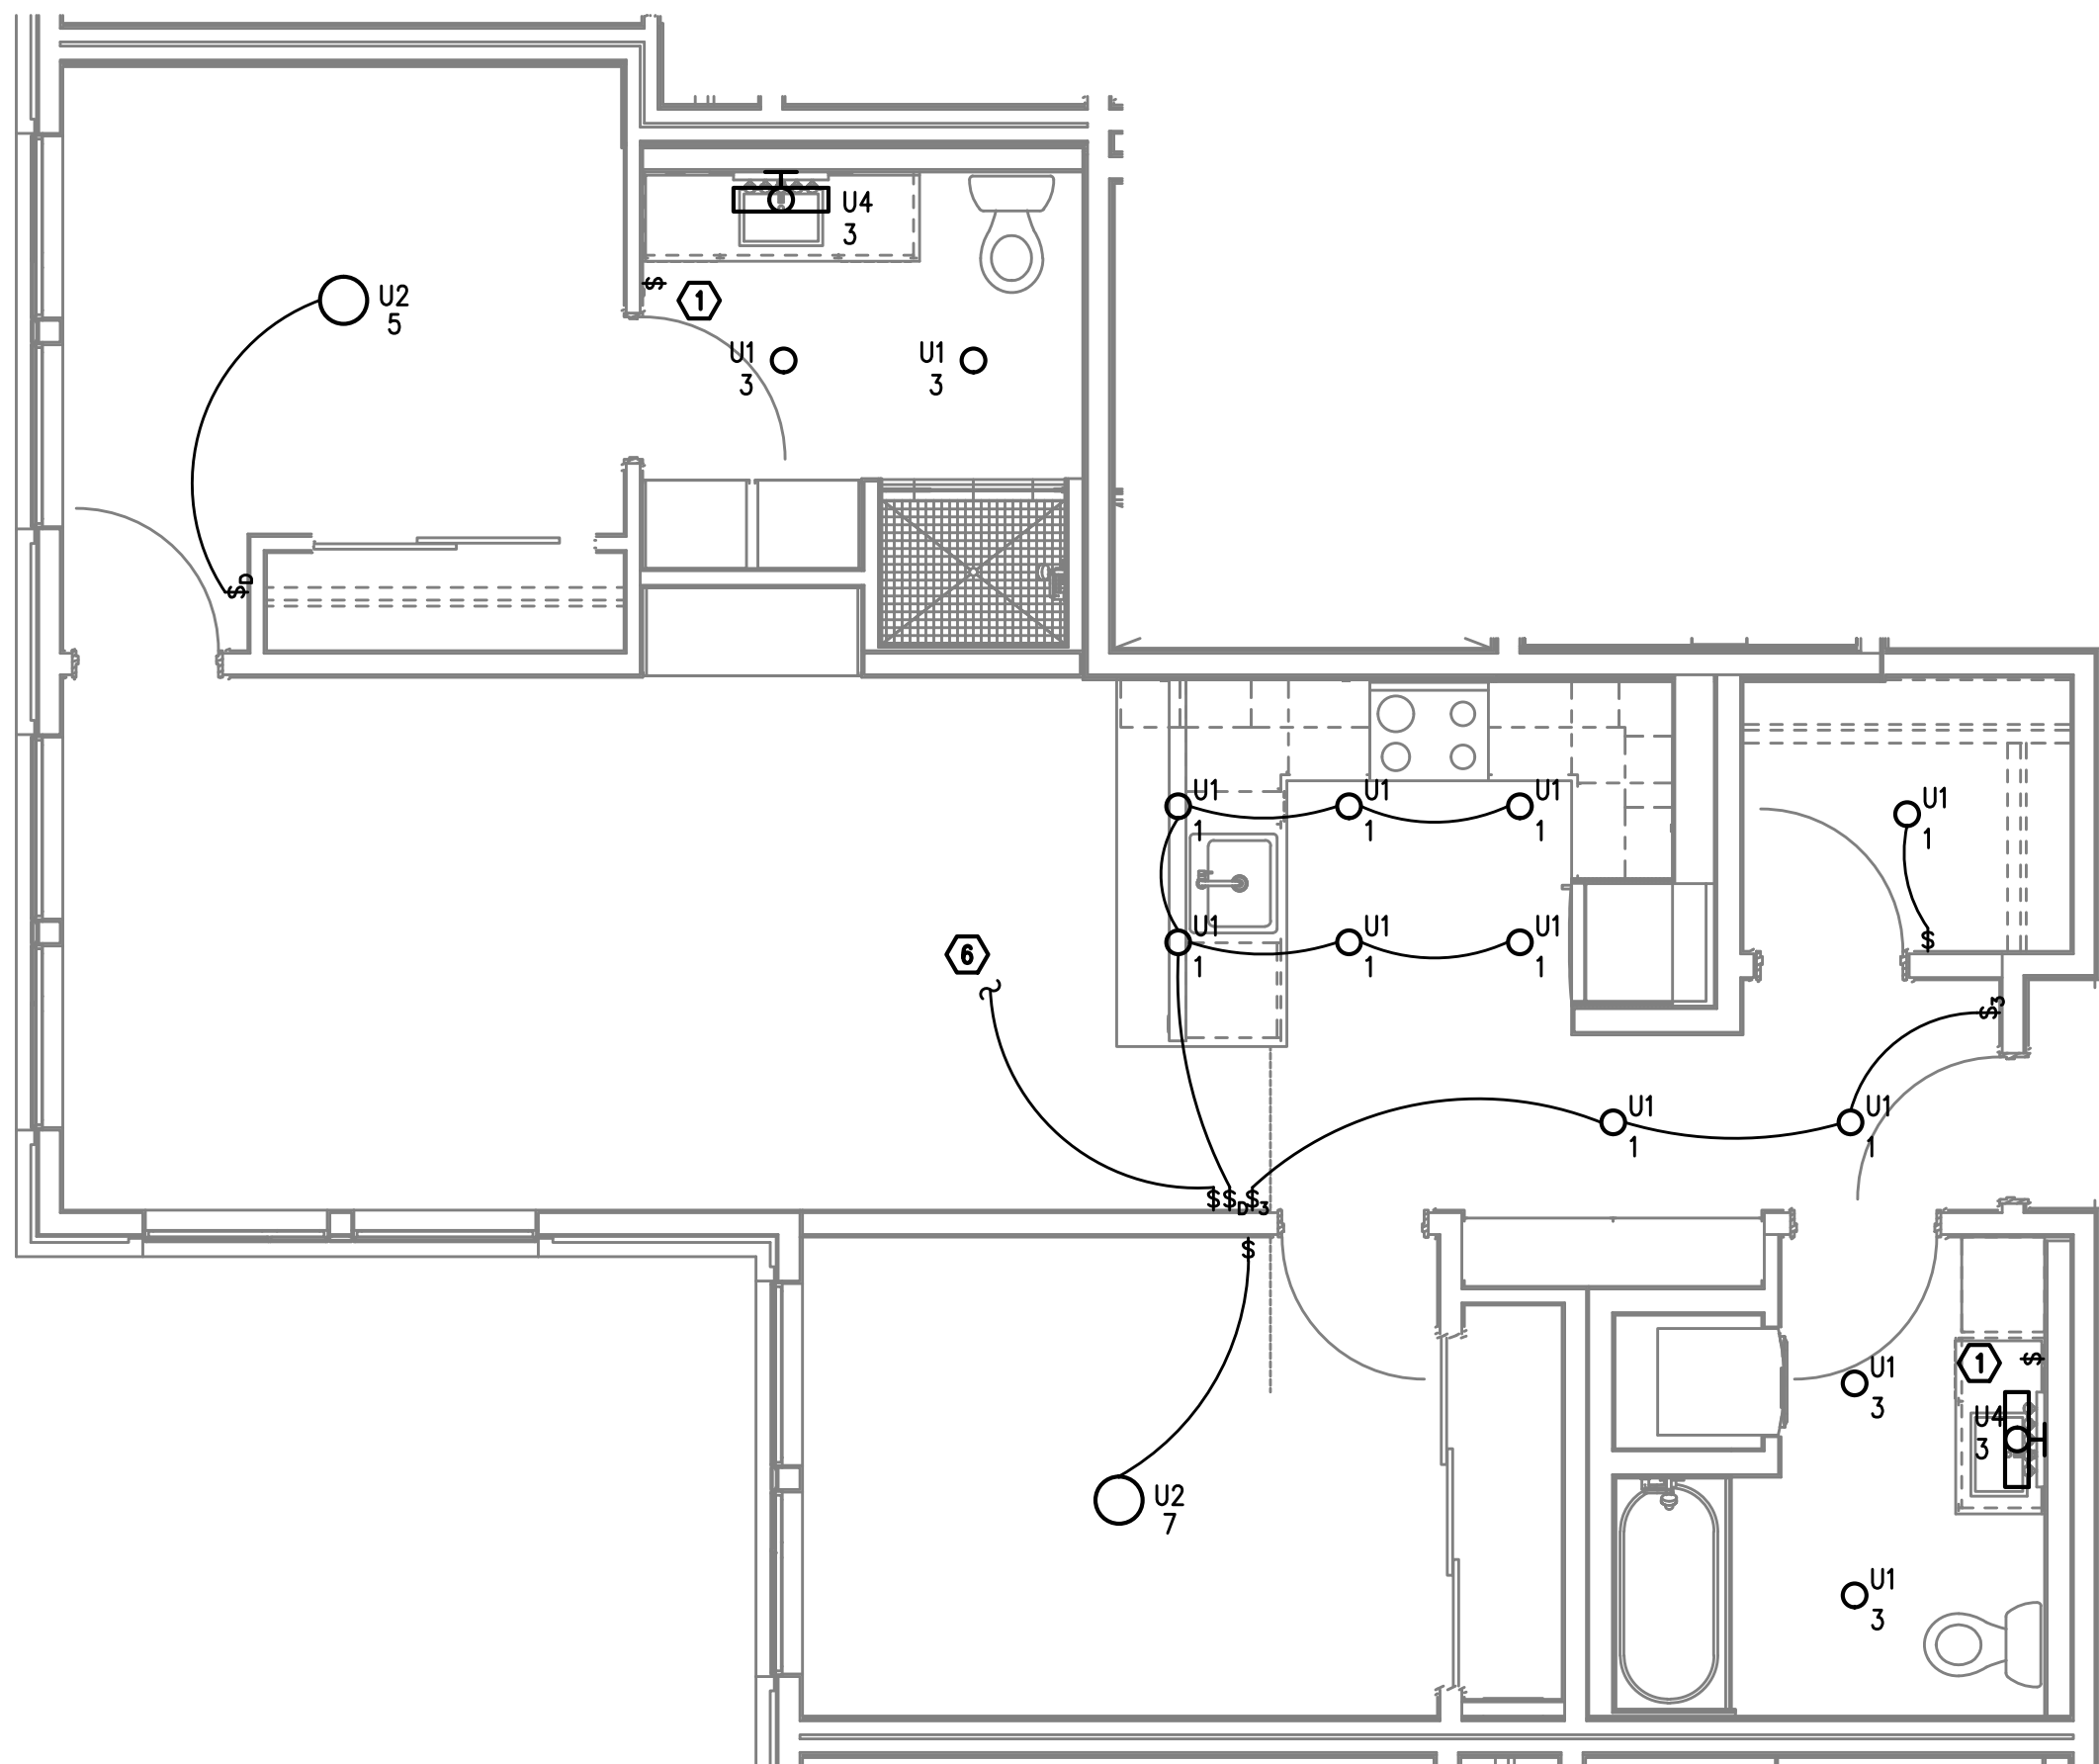

2 UNIT TYPE 'M' — LIGHTING PLAN
E4.04 1/4" = 1'-0"

GENERAL NOTES:

- ALL PLANS ARE DIAGRAMMATICAL. CONSULT ARCHITECTURAL PLANS FOR EXACT LOCATION OF ALL DEVICES AND FIXTURES.
- REFER TO SHEET E1.14 FOR TYPICAL UNIT LOAD CENTER DIRECTORIES.
- ALL LIGHT SWITCHES SHALL BE DIMMER STYLE, SUCH AS LEVITON DECORA, OR APPROVED EQUAL, UNLESS OTHERWISE NOTED.
- REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT FIXTURE LOCATIONS AND MOUNTING HEIGHTS.

KEYED NOTES:

- REFER TO TYPICAL BATHROOM SWITCHING DETAILS ON SHEET E1.22.
- LOCATE SWITCH FOR SINK LIGHT IN CABINET FALSE FRONT.
- REFER TO ARCHITECTURAL INTERIOR ELEVATIONS FOR LOCATION AND MOUNTING OF UNDER CABINET LIGHTS.
- SWITCHING FOR CEILING FAN SHALL BE MANUFACTURER'S RECOMMENDATION FOR LIGHT AND FAN CONTROL.
- PROVIDE BLOCKING AT CEILING TO SUPPORT 35LB., MINIMUM, FOR CEILING FAN INSTALLATION. REFER TO MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR ADDITIONAL INFORMATION AND REQUIREMENTS.
- TO SWITCHED RECEPTACLE IN LIVING ROOM. REFER TO E4.1 SERIES SHEETS FOR LOCATION.