

LIGHTING FIXTURE LIST – SITE & EXTERIOR					
TYPE	LAMP	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	OPTIONS
S1	LED 3000K 975LM  14W	USAI LIGHTING (OR APPROVED OTHER)	BEVELED 1020 SERIES	TYPE :4.5" DIA. DOWNLIGHT MOUNTING :RECESSED HOUSING :ALUMINUM LENS/REFL :SOLITE VOLTAGE :MVOLT BALLAST :LED DRIVER	UL LISTED WET LOCATION CUSTOM FINISH TO MATCH METAL SOFFIT BLACK OR BRONZE FINISH PER ARCHITECT  MAIN BUILDING ENTRANCES
S2	LED 3000K 650LM  10W	BEGA LIGHTING (OR APPROVED OTHER)	66-655 SERIES	TYPE :EXTERIOR SCONCE MOUNTING :SURFACE (+8'-0" AFG) HOUSING :ALUMINUM LENS/REFL :TEMPERED GLASS VOLTAGE :MVOLT BALLAST :LED DRIVER	20 DEGREE BEAM ANGLE. FIXTURE SHALL BE DOWNLIGHT ONLY. FIXTURES LOCATED AT ROOF TERRACE MOUNT AT 7'-0" AFF. BLACK OR BRONZE FINISH PER ARCHITECT BUILDING EXTERIOR, ROOF TERRACE
S3	LED 3000K 2450LM  22W	GARDCO LIGHTING (OR APPROVED OTHER)	PWS SERIES	TYPE :EXTERIOR WALL PACK MOUNTING :SURFACE (+8'-0") HOUSING :ALUMINUM LENS/REFL :ACRYLIC VOLTAGE :MVOLT BALLAST :LED DRIVER	TYPE III DISTRIBUTION  BUILDING SERVICE ENTRANCES
S4	LED 3000K ----LM --W	TBD (OR APPROVED OTHER)	TBD	TYPE :EXTERIOR WALL SCONCE MOUNTING :SURFACE (+8'-0") HOUSING :ALUMINUM LENS/REFL :ACRYLIC VOLTAGE :MVOLT BALLAST :LED DRIVER	BUILDING ENTRANCES

#### LIGHTING NOTES:

- A. REFER TO SHEET E1.21 FOR ADDITIONAL LIGHTING AND KEYED NOTES.


#### LANDSCAPE LIGHTING:

TYPE	LAMP	VOLTAGE	DESCRIPTION
LT1	LED	12V	LED TAPE & CHANNEL
LT2	LED	120V	RECESSED STEP LIGHT
LT3	LED	120V	WALL MOUNTED SPOT LIGHT
LT4	LED	12V	RAIL MOUNTED LIGHT
LT5	LED	120V	RECESS DOWNLIGHT
LT6	LED	120V	SURFACE MOUNTED PARAPET LIGHT

#### LANDSCAPE LIGHTING NOTES:


- A. ELECTRICAL CONTRACTOR TO PROVIDE ELECTRICAL POWER TO THE TERRACE LIGHTING AS INDICATED. FIXTURES TO BE PURCHASED AND INSTALLED BY THE LANDSCAPER AND THE ELECTRICAL CONTRACTOR SHALL PROVIDE FINAL POWER CONNECTION, UNLESS OTHERWISE NOTED.
- B. REFER TO LANDSCAPE PLANS & SPECIFICATIONS FOR EXACT LIGHTING REQUIREMENTS AND MOUNTING HEIGHTS.
- C. COORDINATE ALL WORK WITH THE LANDSCAPER PRIOR TO AND DURING CONSTRUCTION.
- D. ALL TERRACE LIGHTING SHALL BE WET LOCATION LISTED.
- E. ALL TERRACE LIGHTING SHALL BE CIRCUITED VIA MECHANICAL TIME CLOCK. REFER TO THE LIGHTING CONTROL PANEL DIAGRAM ON THIS SHEET.

LIGHTING FIXTURE LIST – EXITING					
TYPE	LAMP	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	OPTIONS
X1	LED (GREEN LETTERS)  (1.5W)	LITHONIA DMF LIGHTING (OR APPROVED OTHER)	LE EL N SERIES DLED500EM-G	TYPE :EXIT SIGN MOUNTING :UNIVERSAL HOUSING :DIE-CAST ALUMINUM LENS/REFL :SINGLE FACE/DUAL FACE VOLTAGE :MVOLT BALLAST :NICKLE CADMIUM BATTERY	
X2	LED (GREEN LETTERS)  (3.5W)	LITHONIA (OR APPROVED OTHER)	LRE SERIES	TYPE :EXIT SIGN MOUNTING :RECESSED HOUSING :DIE-CAST ALUMINUM LENS/REFL :SINGLE FACE VOLTAGE :MVOLT BALLAST :NICKLE CADMIUM BATTERY	MOUNTED CENTERED ABOVE DOOR UNLESS OTHERWISE NOTED.
X3	LED (GREEN LETTERS)  (3.5W)	LITHONIA (OR APPROVED OTHER)	WLTE EL SERIES BLACK FINISH	TYPE :EXIT SIGN MOUNTING :UNIVERSAL HOUSING :DIE-CAST ALUMINUM LENS/REFL :SINGLE FACE VOLTAGE :MVOLT BALLAST :NICKLE CADMIUM BATTERY	UL LISTED WET LOCATION
X4	LED (GREEN LETTERS)  (3.5W)	EATON (OR APPROVED OTHER)	EUX SERIES	TYPE :EXIT SIGN MOUNTING :SURFACE HOUSING :DIE-CAST ALUMINUM LENS/REFL :SINGLE FACE VOLTAGE :MVOLT BALLAST :NICKLE CADMIUM BATTERY	SURFACE MOUNT AT STOREFRONT MULLION

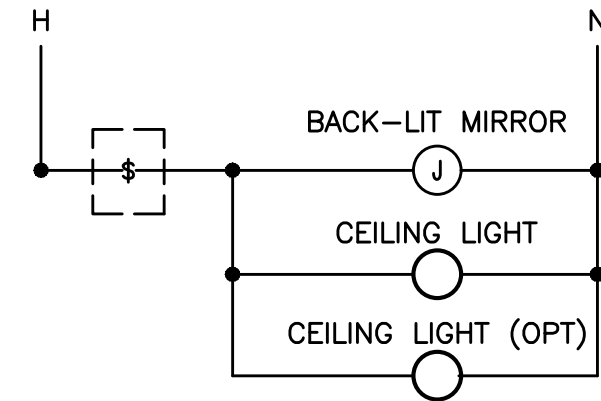


BATHROOM WITH CEILING LIGHT(S)  
& BACK-LIT MIRROR


1  
E1.22 BATHROOM SWITCHING DIAGRAMS – TYPICAL  
NO SCALE

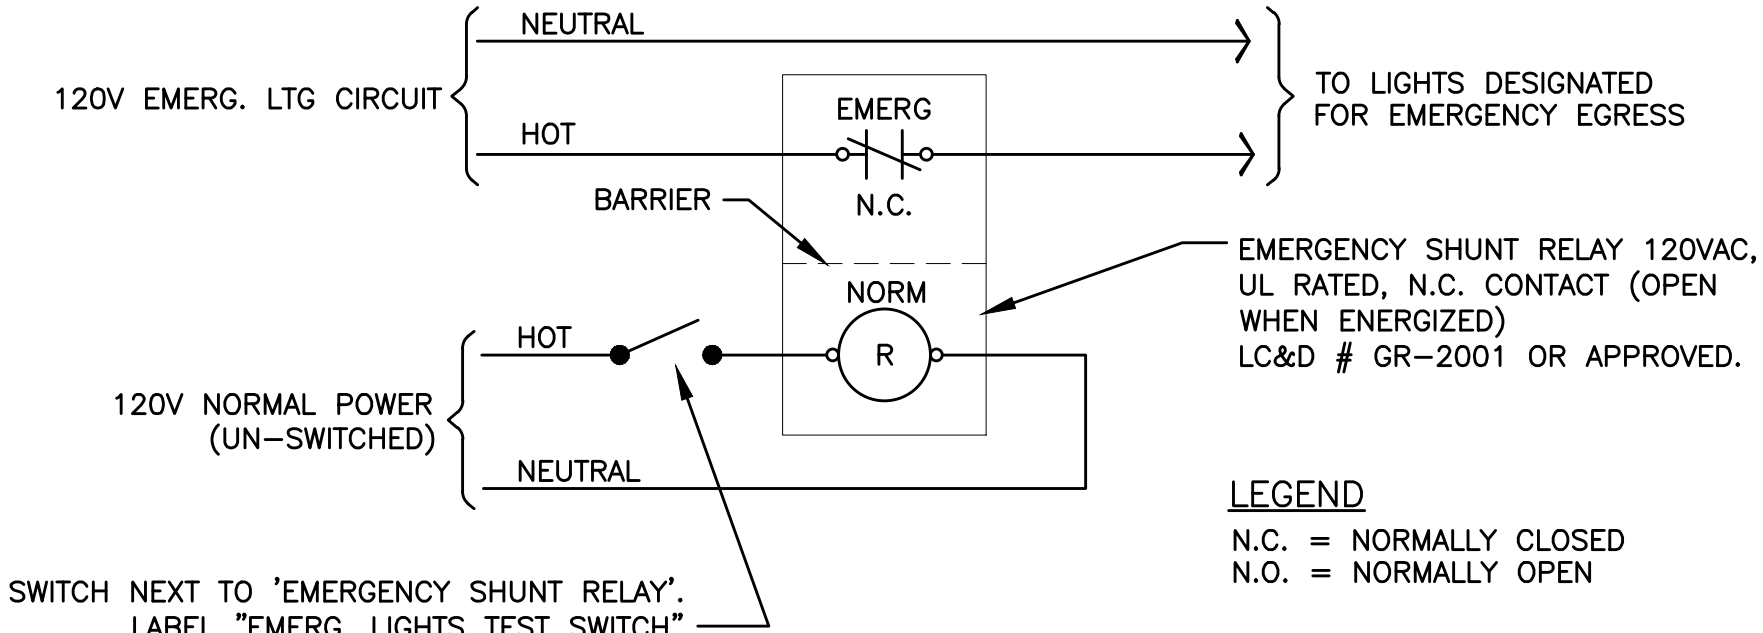

2  
E1.22 EMERGENCY EGRESS LIGHTING – UNSWITCHED  
NO SCALE

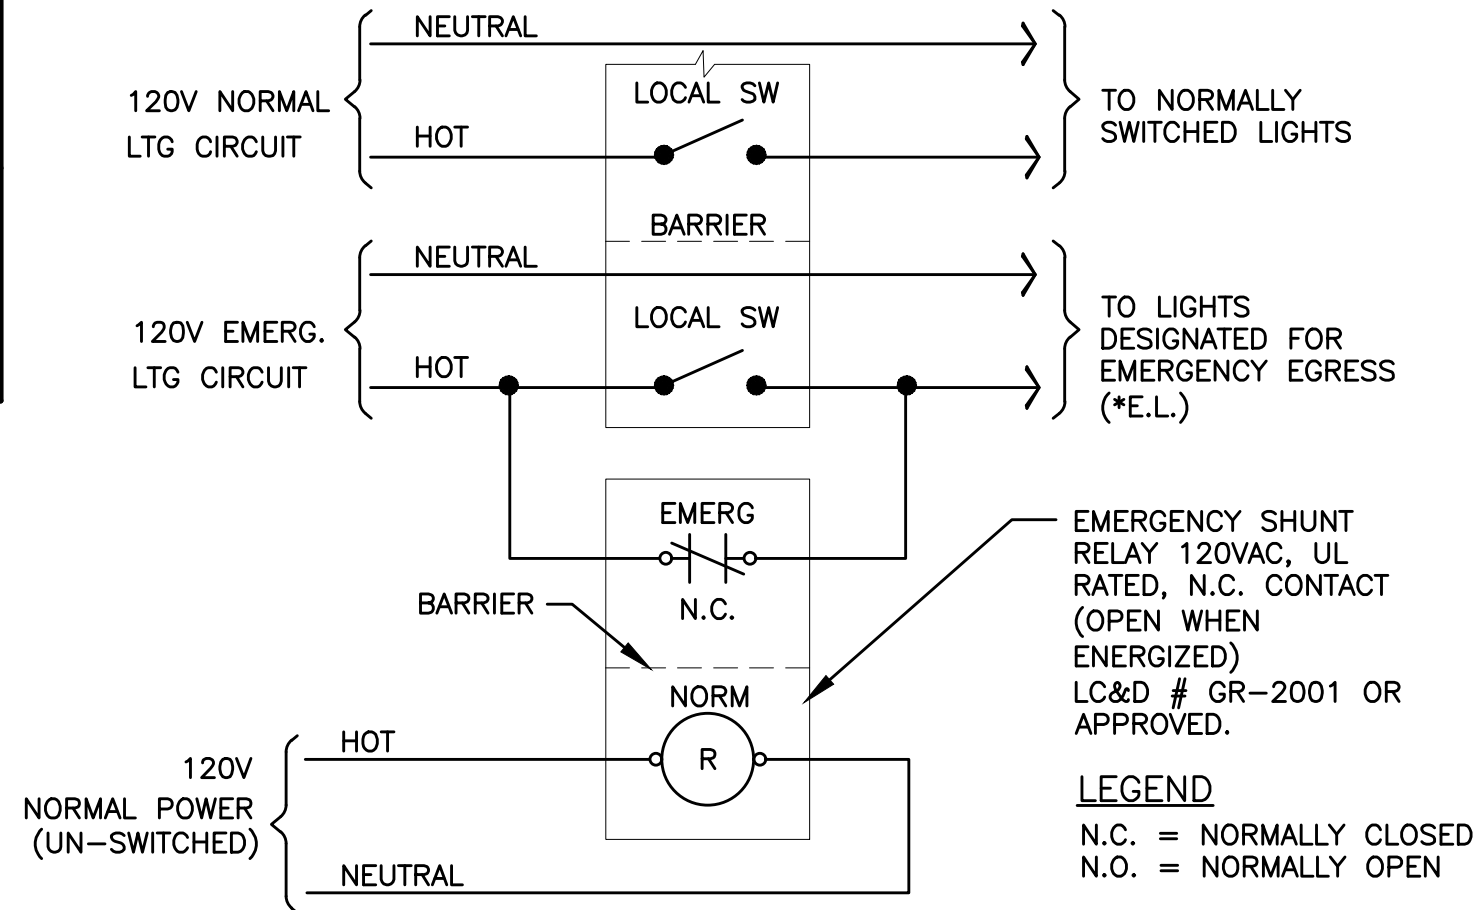

3  
E1.22 EMERGENCY EGRESS LIGHTING – SWITCHED  
NO SCALE

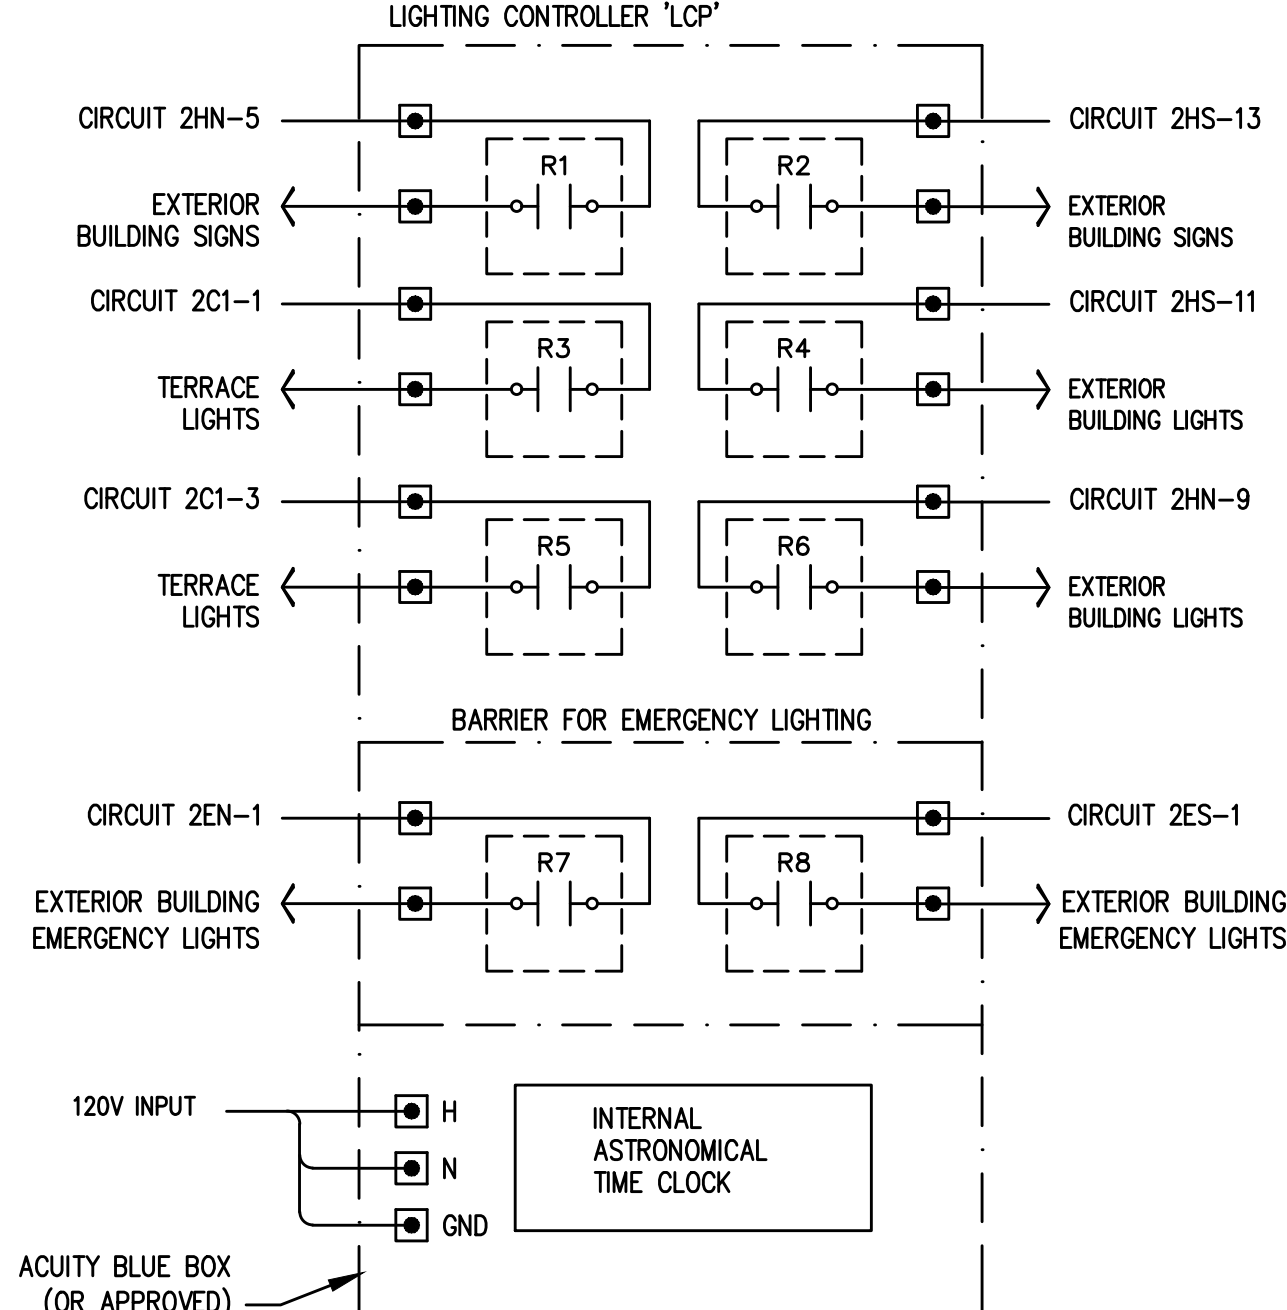


4  
E1.22 EXTERIOR LIGHTING CONTROL  
SYSTEM DIAGRAM – LCP  
NO SCALE

**M**  
**E**  
**I**  
**A**  
**INC.**  
Consulting Engineers  
2007 S.E. Ash St.  
Portland, OR 97214  
PHN: (503) 234-0548  
FAX: (503) 234-0877  
WWW.MFIA-ENG.COM  
CONTACT: DENISE TAYLOR

STUDIO  
**3**  
ARCHITECTURE  
INCORPORATED

275 COURT ST. NE  
SALEM, OR 97301-3442  
P: 503.390.6500  
www.studio3architecture.com

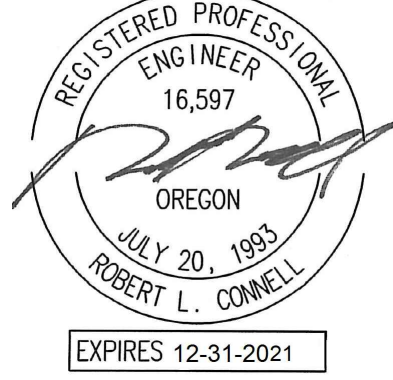

IN THE EVENT CONFLICTS ARE DISCOVERED  
BETWEEN THE ORIGINAL SIGNED AND SEALED  
DOCUMENTS PREPARED BY THE ARCHITECTS  
AND/OR THEIR CONSULTANTS, AND ANY COPY OF  
THE DOCUMENTS TRANSMITTED BY MAIL, FAX,  
ELECTRONICALLY OR OTHERWISE, THE ORIGINAL  
SIGNED AND SEALED DOCUMENTS SHALL GOVERN.

PROJECT # 2017-110  
DATE: 06/16/2021  
PERMIT SET

REVISIONS

**BURNSIDE  
MIXED USE**  
2202 E BURNSIDE ST, PORTLAND, OR 97214

SHEET:

**E1.22**

LIGHTING SCHEDULES & DETAILS