


1525CW

FSK INSULATION TAPE

VentureTape® 1525CW COLD WEATHER FSK is a foil/scrim/kraft (FSK) lamination coated with Venture's cold weather solvent acrylic pressure sensitive adhesive. This versatile FSK tape applies easily to both fibrous and sheet metal ducts and easily conforms to irregular surfaces. Venture Tape 1525CW excels in demanding temperature and humidity applications and provides superior performance and durability over a wide range of environmental conditions.

Product Construction

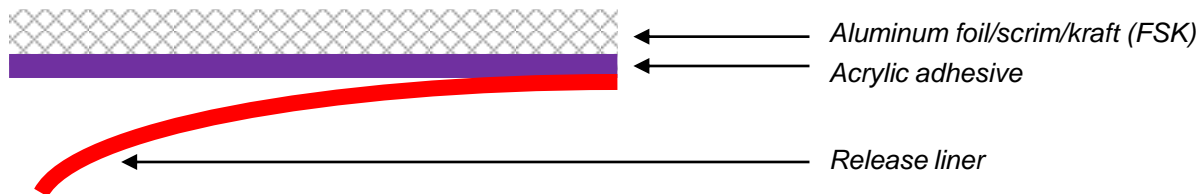

Features & Benefits

- UL723 Classified (5/10 Flame/Smoke Rating)
UL file # R10984
- FSK facing meets ASTM C1136, type II and IV
- Tri-directionally reinforced 2 x 3 squares per inch fiberglass scrim, UL listed FSK lamination
- High performance insulation tape is ideal for use as a vapor seal for reinforced fiberglass or mineral wool thermal insulation
- Venture CW® cold weather solvent acrylic adhesive performs well over a wide temperature range

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness ^Ω	9.5 mils	0.24 mm	PSTC-133
Peel Adhesion ^Δ	45 oz/in	12.5 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	40 lb/in	180.8 N/25 mm	PSTC-131
Elongation	2 %	2 %	PSTC-131
Service Temperature	-40 to 250 °F	-40 to 121 °C	

^Ω - excluding liner

^Δ - 20 minute dwell

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- Standard sizes: 3" x 50Y, 4" x 50Y, 5" x 50Y, 6" x 50Y
- Custom widths and lengths available, contact Venture Tape for specifications and require

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

www.venturetape.com

SHOP DRAWINGS AND PRODUCT DATA



Checking is only for general conformance with the design concept of the project and general compliance with the information given in the contact documents. Any action shown is subject to the requirements of the plans and specifications. Contractor is responsible for: Dimensions, which shall be confirmed and correlated at the job site; fabrication processes and techniques of construction; coordination of his work with that of all other trades; and the satisfactory performance of this work.

- NO EXCEPTION TAKEN
- REVIEWED AS NOTED
- REVISE AND RESUBMIT

DATE: 3-7-22

SIGNED: MATT AUTREY

VentureTape®

GTA - NHT, Inc.
 Venture Tape
 30 Commerce Rd., Rockland, MA 02370
 Tel 781-331-5900; Fax 781-871-0065
 800-343-1076 (U.S.A.), 800-544-1024 (Canada)
 Toll Free Fax 877-264-5490
 www.venturetape.com

GTA
 TAPES & ADHESIVES
 a 3M Company